






ET28 EMI FILTER

FWCMET28H SERIES

DIMENSIONS (mm)

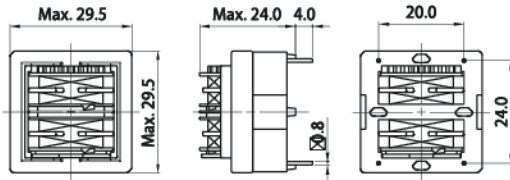


Schematics



Ferriwo Part No.	Inductance (1-2) (4-3) @1kHz	D.C.R. (1-2) (4-3) @20°C	Rated Current (50/60Hz)
FWCMET28H182N	Min. 1.8mH	Max. 0.072Ω	2.6Arms
FWCMET28H682N	Min. 6.8mH	Max. 0.23Ω	1.6Arms
FWCMET28H123N	Min. 12mH	Max. 0.38Ω	1.2Arms
FWCMET28H223N	Min. 22mH	Max. 0.65Ω	1.0Arms
FWCMET28H393N	Min. 39mH	Max. 1.43Ω	0.7Arms
FWCMET28H683N	Min. 68mH	Max. 1.82Ω	0.6Arms

Impedance Characteristics

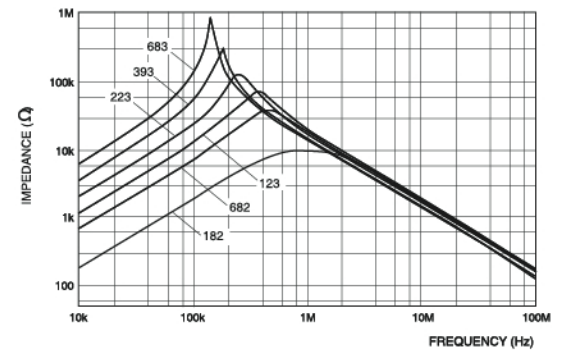

Application


1. Switching power supply, TV, PC, UPS.

Features



1. Inexpensive type.
2. Large inductance is possible with closed magnetic core.

FWCMET28V SERIES

DIMENSIONS (mm)

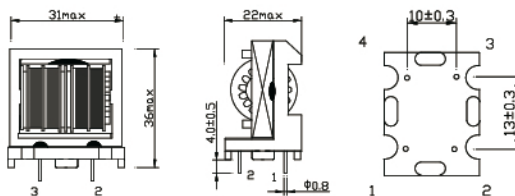


Schematics



Ferriwo Part No.	Inductance (1-2) (4-3) @1kHz	D.C.R. (1-2) (4-3) @20°C	Rated Current (50/60Hz)
FWCMET28V182N	Min. 1.8mH	Max. 0.05Ω	4.0Arms
FWCMET28V332N	Min. 3.3mH	Max. 0.09Ω	3.0Arms
FWCMET28V472N	Min. 4.7mH	Max. 0.1Ω	2.8Arms
FWCMET28V562N	Min. 5.6mH	Max. 0.13Ω	2.5Arms
FWCMET28V802N	Min. 8.0mH	Max. 0.18Ω	2.0Arms
FWCMET28V123N	Min. 12mH	Max. 0.27Ω	1.8Arms
FWCMET28V203N	Min. 20mH	Max. 0.4Ω	1.5Arms
FWCMET28V253N	Min. 25mH	Max. 0.55Ω	1.2Arms
FWCMET28V353N	Min. 35mH	Max. 0.78Ω	1.0Arms

Impedance Characteristics

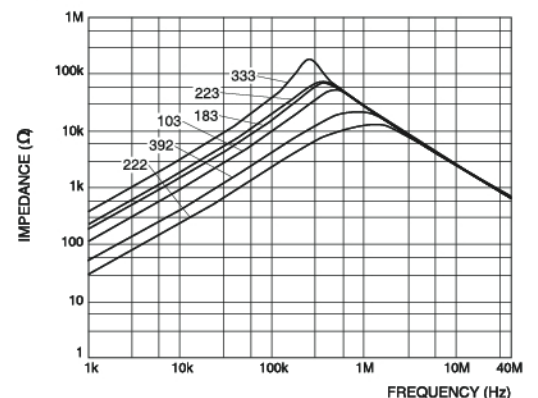

Application

1. Noise prevention for TV, VCR, AV, OA equipments.

Features

1. Large inductance type in spite of its small size.
2. Excellent attenuation characteristics in low frequency.