

KEY FEATURES

- Switching Power Module for PCB Mountable
- Fully Encapsulated Plastic Case
- Universal Input Range 90-264VAC, 47-440 Hz
- Regulated Output
- Low Ripple and Noise
- CE, UL Approval
- 3-Year Product Warranty



LT10W SERIES



ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. (Single Output)	FSP010LWVS3V3P	FSP010LWVS005P	FSP010LWVS012P	FSP010LWVS015P	FSP010LWVS024P		
Max Output Wattage (W)	10W	10W	10W	10W	10W		
Input	Voltage						
	90-264 VAC or 120-370 VDC						
	Frequency (Hz)						
	47-440 Hz						
	Current (Full load)						
	200 mA max. (115 VAC) / 130 mA max. (230 VAC)						
Input	Inrush Current (<2ms)						
	10 A max. (115 VAC) / 20 A max. (230 VAC)						
	Leakage Current						
	0.75 mA max.						
	External Fuse (recommend)						
	1.5 A slow blow type						
Output	Voltage (V.DC.)		3.3V	5V	12V	15V	24V
	Voltage Accuracy		±2%				
	Current (mA) max		3000	2000	833	666	426
	Line Regulation (LL-HL) (typ.)		±0.5%				
	Load Regulation (5-100%) (typ.)		±1%				
	Minimum Load		4%	5%	5%	3%	5%
	Maximum Capacitive Load		70000 uF	35000 uF	11000 uF	7000 uF	2300 uF
	Ripple		<0.2% Vout +40mV max (Vp-p)				
	Noise		<0.5% Vout +50mV max (Vp-p)				
	Efficiency		65%	71%	76%	75%	76%
	Hold-up Time		15 ms min.				
Protection	Over Power Protection		Hiccup technique, auto-recovery				
	Over Voltage Protection		Zener diode clamp				
	Short Circuit Protection		Hiccup mode, indefinite (automatic recovery)				
Isolation	Input-Output (V.AC)		3000V				
	Input-FG (V.AC)		1500V				
	Output-FG (V.AC)		500V				
Environment	Operating Temperature		-25°C...+70°C (with derating)				
	Storage Temperature		-40°C...+85°C				
	Temperature Coefficient		±0.02%/°C				
	Humidity		95% RH				
	MTBF		>250,000 h @ 25°C (MIL-HDBK-217F)				
Physical	Dimension (L x W x H)		2.53 x 1.78 x 0.85 Inches (64.3 x 45.1 x 21.7 mm) Tolerance ±0.5 mm				
	Case Material		Plastic resin (flammability to UL 94V-0)				
	Weight		92 g				
	Cooling Method		Free air convection				
Safety	Agency Approvals		UL/cUL, CE				
EMC	EMI (Conducted & Radiated Emission)		EN 55032 class B				
	EMS (Noise Immunity)		EN 50082-1				

ELECTRICAL SPECIFICATIONS


All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. (Dual Output)	FSP010LWVD005P	FSP010LWVD012P	FSP010LWVD015P
Max Output Wattage (W)	8W	10W	10W
Input	Voltage		
	90-264 VAC or 120-370 VDC		
	Frequency (Hz)		
	47-440 Hz		
	Current (Full load)		
	200 mA max. (115 VAC) / 130 mA max. (230 VAC)		
Inrush Current (<2ms)			
10 A max. (115 VAC) / 20 A max. (230 VAC)			
Leakage Current			
0.75 mA max.			
External Fuse (recommend)			
1.5 A slow blow type			
Output	Voltage (V.DC.)		
	±5V		
	±12V		
	±15V		
	Voltage Accuracy		
	±2%		
	Current (mA) max		
	±800		
	±380		
	±300		
	Line Regulation (LL-HL) (typ.)		
±0.5%			
Load Regulation (5-100%) (typ.)			
±1%			
Minimum Load			
1%			
3%			
1%			
Maximum Capacitive Load			
±22000 uF			
±3000 uF			
±2000 uF			
Ripple			
<0.2% Vout +40mV max (Vp-p)			
Noise			
<0.5% Vout +50mV max (Vp-p)			
Efficiency			
73%			
75%			
74%			
Hold-up Time			
15 ms min.			
Protection	Over Power Protection		
	Hiccup technique, auto-recovery		
	Over Voltage Protection		
Zener diode clamp			
Short Circuit Protection			
Hiccup mode, indefinite (automatic recovery)			
Isolation	Input-Output (V.AC)		
	3000V		
	Input-FG (V.AC)		
1500V			
Output-FG (V.AC)			
500V			
Environment	Operating Temperature		
	-25°C...+70°C (with derating)		
	Storage Temperature		
	-40°C...+85°C		
	Temperature Coefficient		
±0.02%/°C			
Humidity			
95% RH			
MTBF			
>250,000 h @ 25°C (MIL-HDBK-217F)			
Physical	Dimension (L x W x H)		
	2.53 x 1.78 x 0.85 Inches (64.3 x 45.1 x 21.7 mm) Tolerance ± 0.5 mm		
	Case Material		
	Plastic resin (flammability to UL 94V-0)		
Weight			
92 g			
Cooling Method			
Free air convection			
Safety	Agency Approvals		
UL/cUL, CE			
EMC	EMI (Conducted & Radiated Emission)		
	EN 55032 class B		
EMS (Noise Immunity)			
EN 50082-1			

NOTE



1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. It's recommended to add Varistor 14S471K at L / N input side in parallel.

MECHANICAL DIMENSION (Top View)

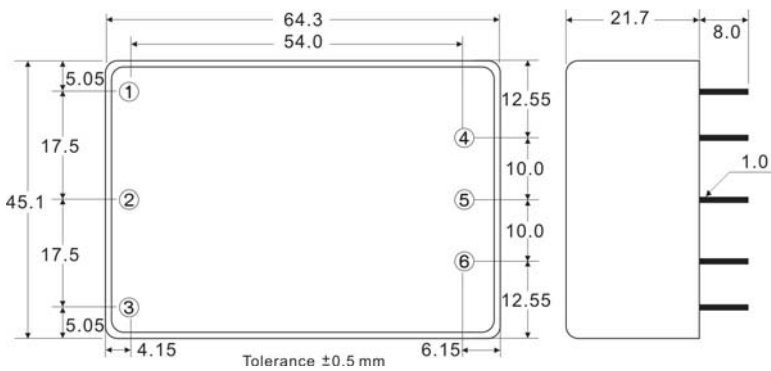

PIN#	Single	Dual
1	FG	FG
2	AC IN (N)	AC IN (N)
3	AC IN (L)	AC IN (L)
4	-DC OUT	-DC OUT
5	NO PIN	COMMON
6	+DC OUT	+DC OUT

BLOCK DIAGRAM

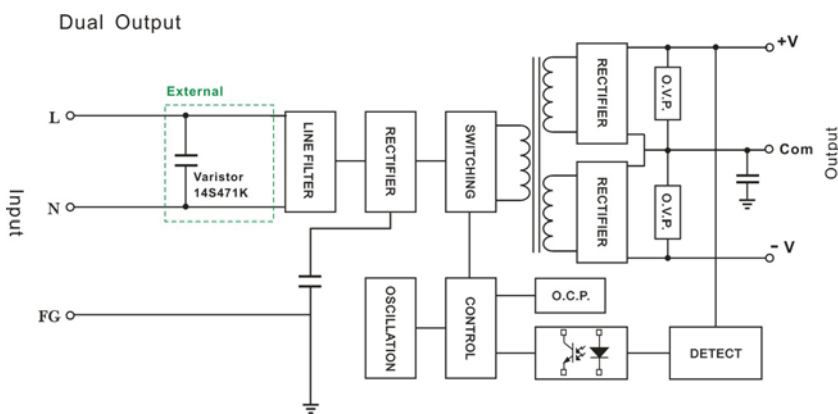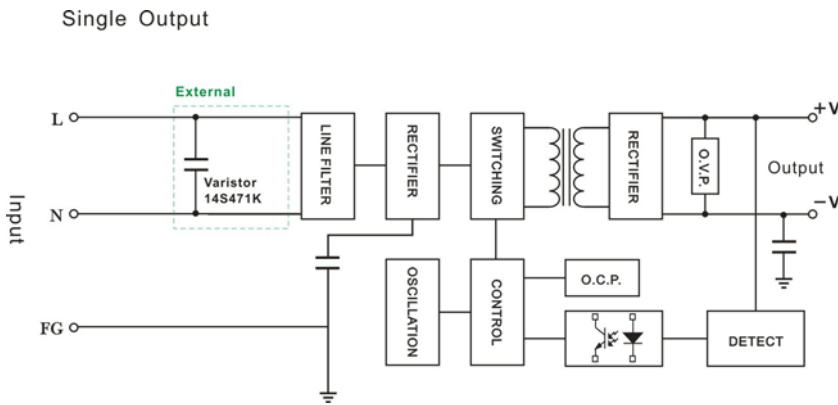

DERATING

