



| | | |
|-------------------|------|-----------------|
| CUSTOMER TERMINAL | ROHS | Lead (Pb) -free |
| | YES | YES |



1. Mechanical Dimensions

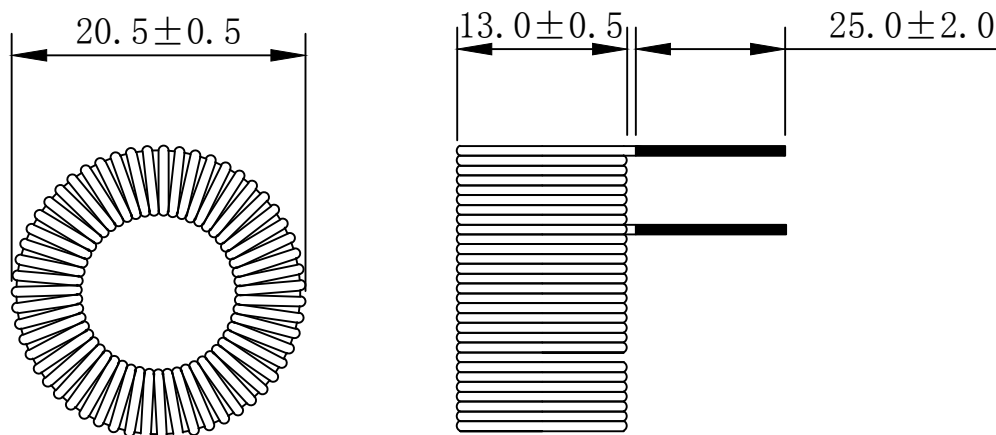

2. Schematic Diagram

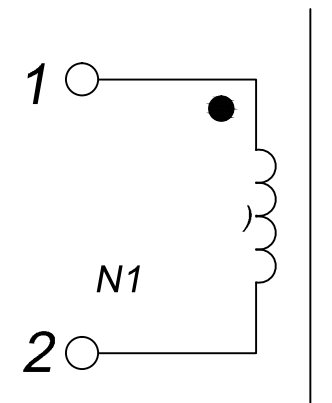

3. Material List

Core:KT68-26D
 Wire:2UEW-F- 0.63mm 155°C
 Varnish: T-4260
 Temperature:-40~115°C

4. Electrical Specification

Inductance: L (1-2) =700uH±20% 1.0KHZ 1.0V

| | | | | | |
|-------------|-------|--------------------------|------|--------------------------------|----------------------------|
| REV. | DATE | Convention Placement | DRW. | Drawing Title: CHOKE | Part No: |
| 0 | 00/00 | | CHK. | | Customer P/N: |
| RoHS | | www.fosopower.com | APP. | TO-2048-A | Specification Sheet 1 of 1 |