


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES



1.Mechanical Dimensions

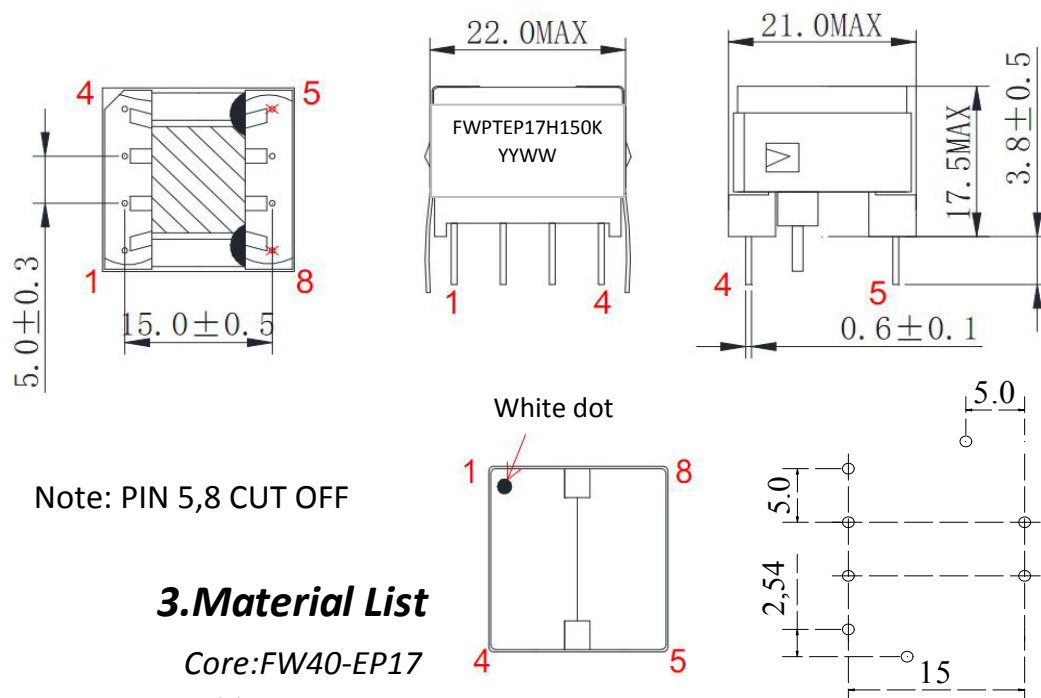

Note: PIN 5,8 CUT OFF

3.Material List

Core:FW40-EP17

Bobbin:FWB1702


Wire:1UEW-0.18/0.42mm 155 °C TIW-B-0.18*7P 130 130 °C

Tape: WF2901-2.0mm CT280/PF301-25u-9.8mm 130 °C

Tube: TFL tube

Operating Temperature: -40 to125 °C

2.Schematic Diagram

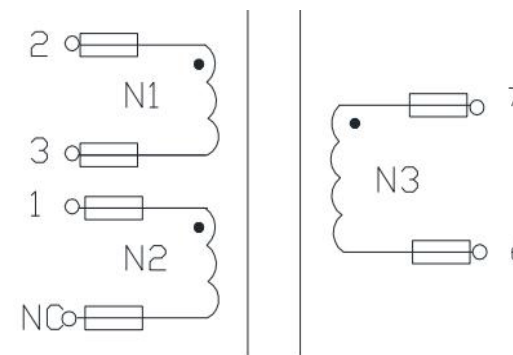

4.Electrical Specification

Inductance: $L(2-3) = 15\mu H \pm 10\%$ 50KHz 0.1V

Leakage Inductance : $L(2-3) = 0.8\mu H$ MAX 100KHz 0.1V
(short PIN6,7)

DCR: $(2-3) = (7-6) = 32m\Omega$ MAX

Hi-Pot:P-S: AC 50Hz 5000V 2mA 60S

P、S-CORE:AC 50Hz 4000V 2mA 60S

REV.	DATE	 Convention Placement	DRW.		Drawing Title:	Part No:
0	00/00		CHK.		TRANSFORMER	FWPTEP17H150K
			APP.		Customer P/N	Specification Sheet 1of 1

ROHS

www.fosopower.com

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION