


CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES




1.Mechanical Dimensions

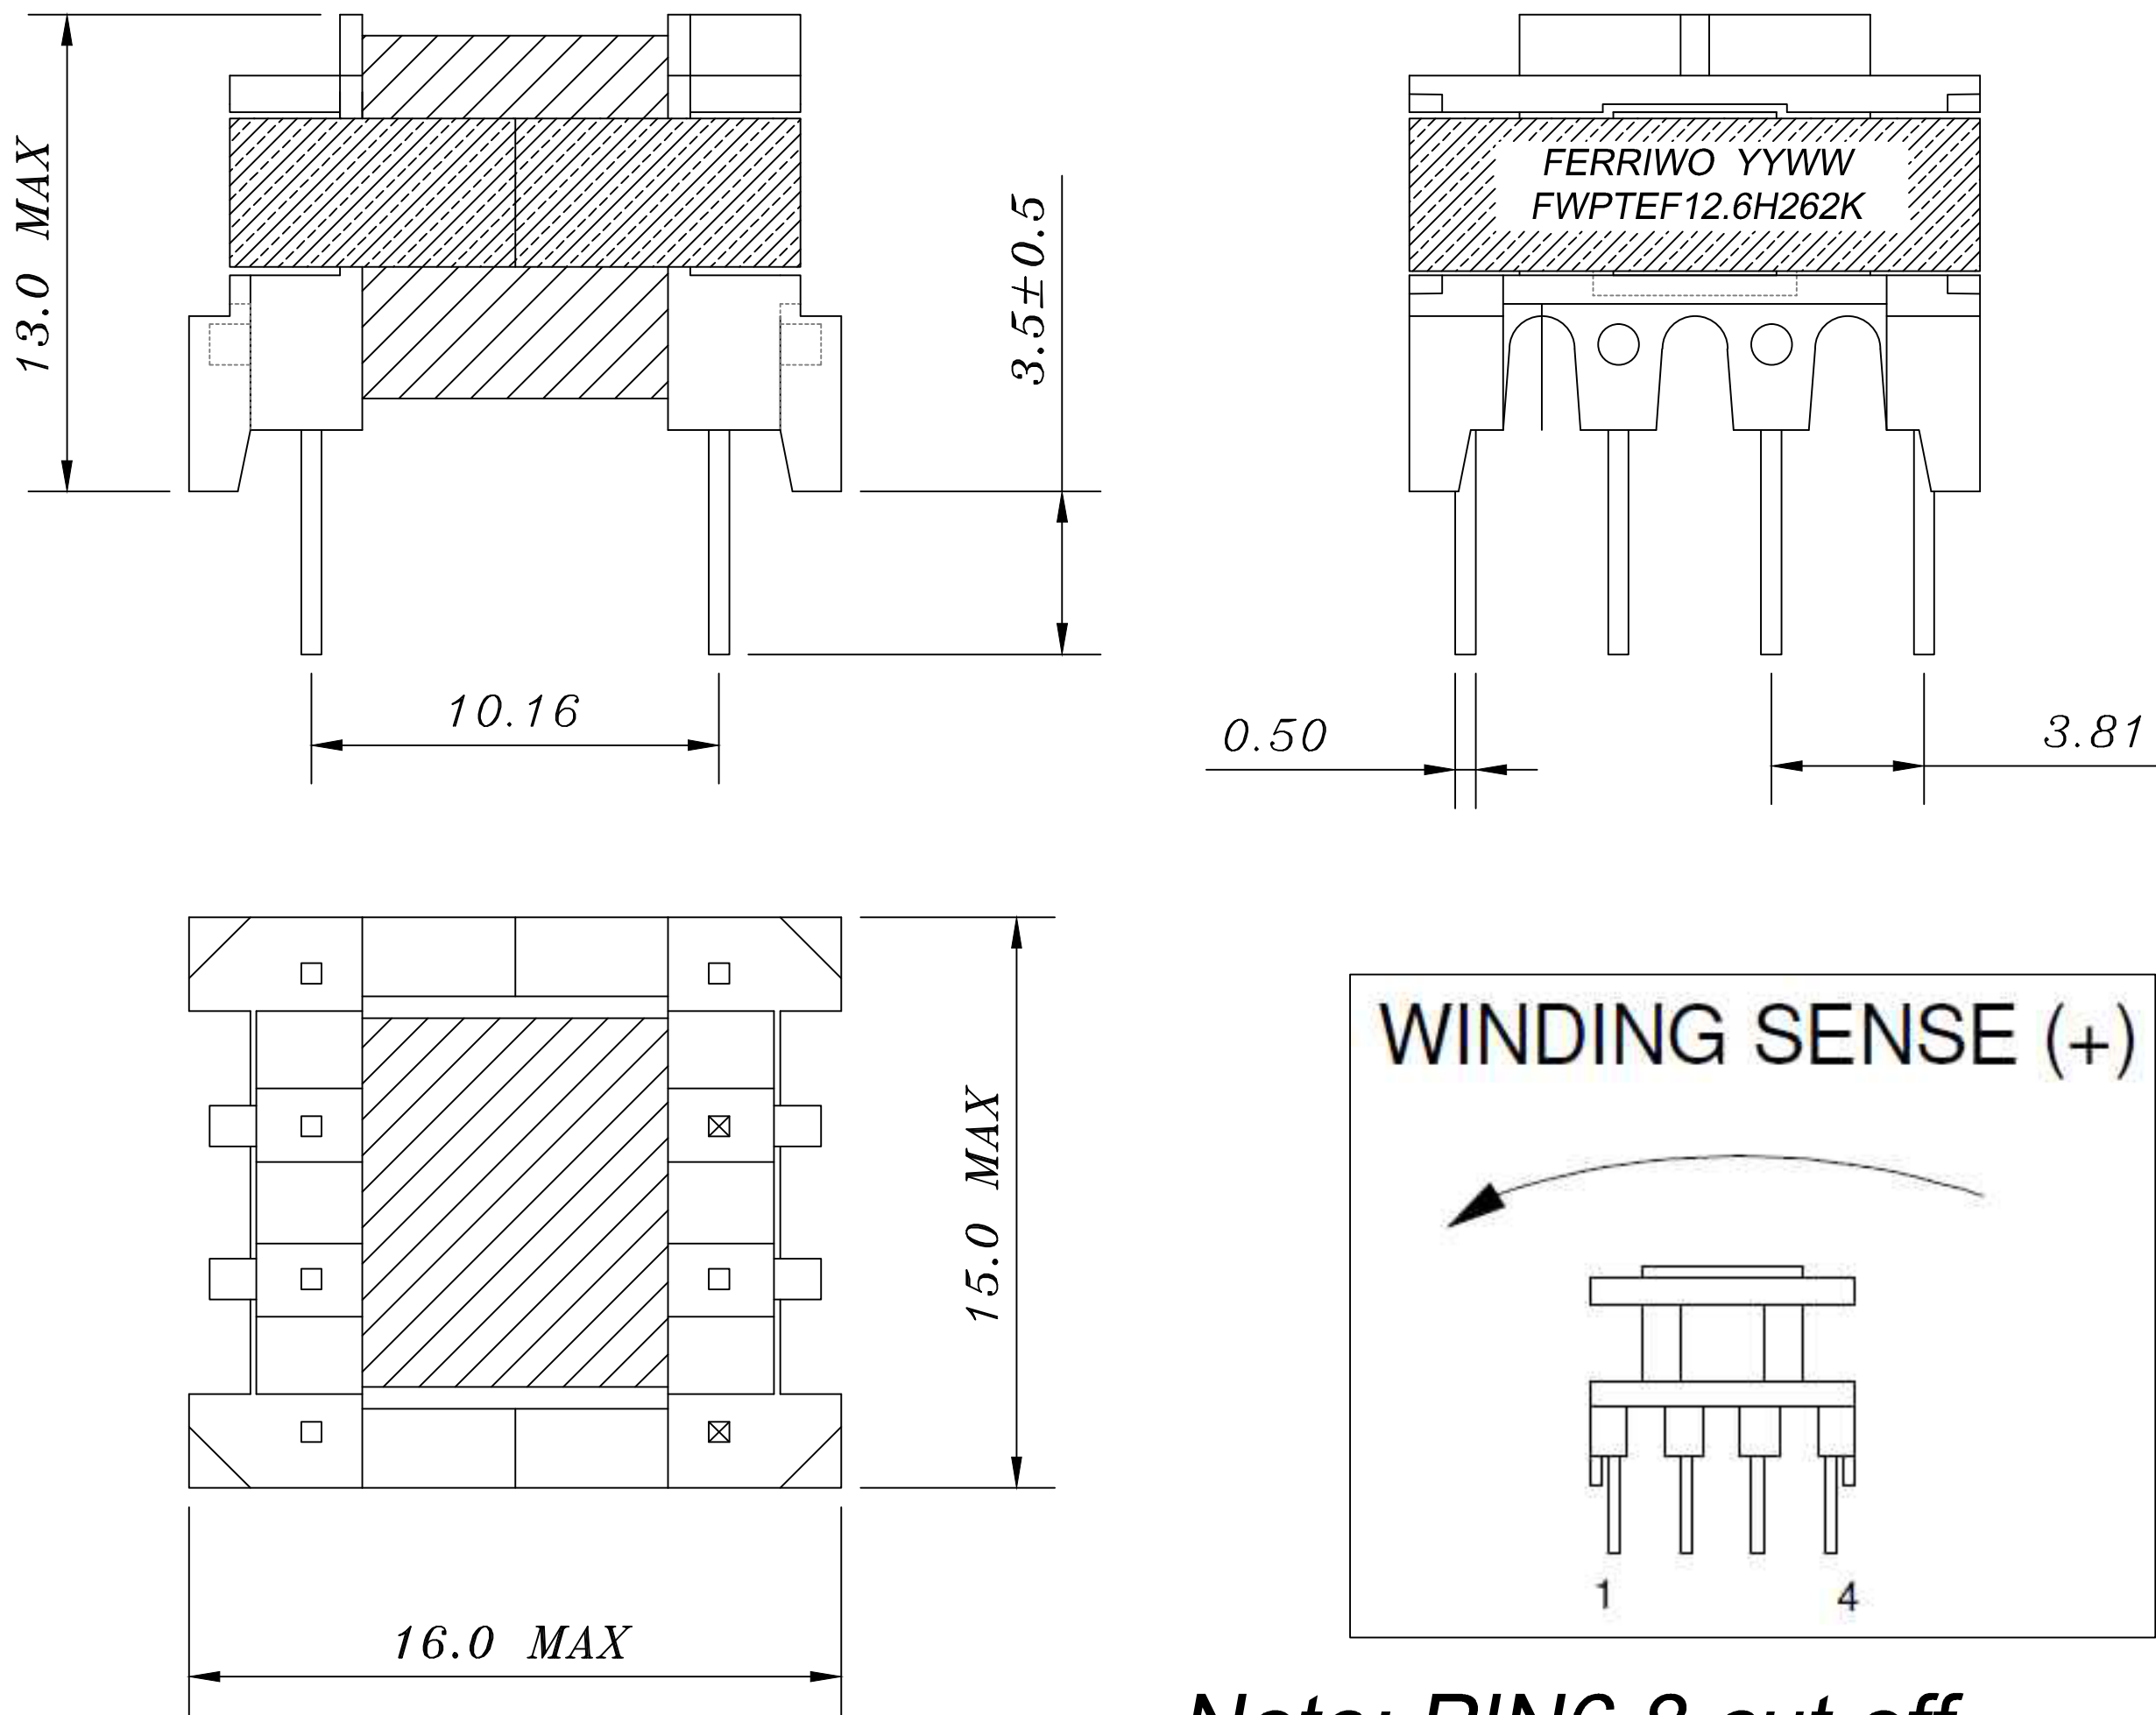

Note: PIN6,8 cut off

2.Schematic Diagram

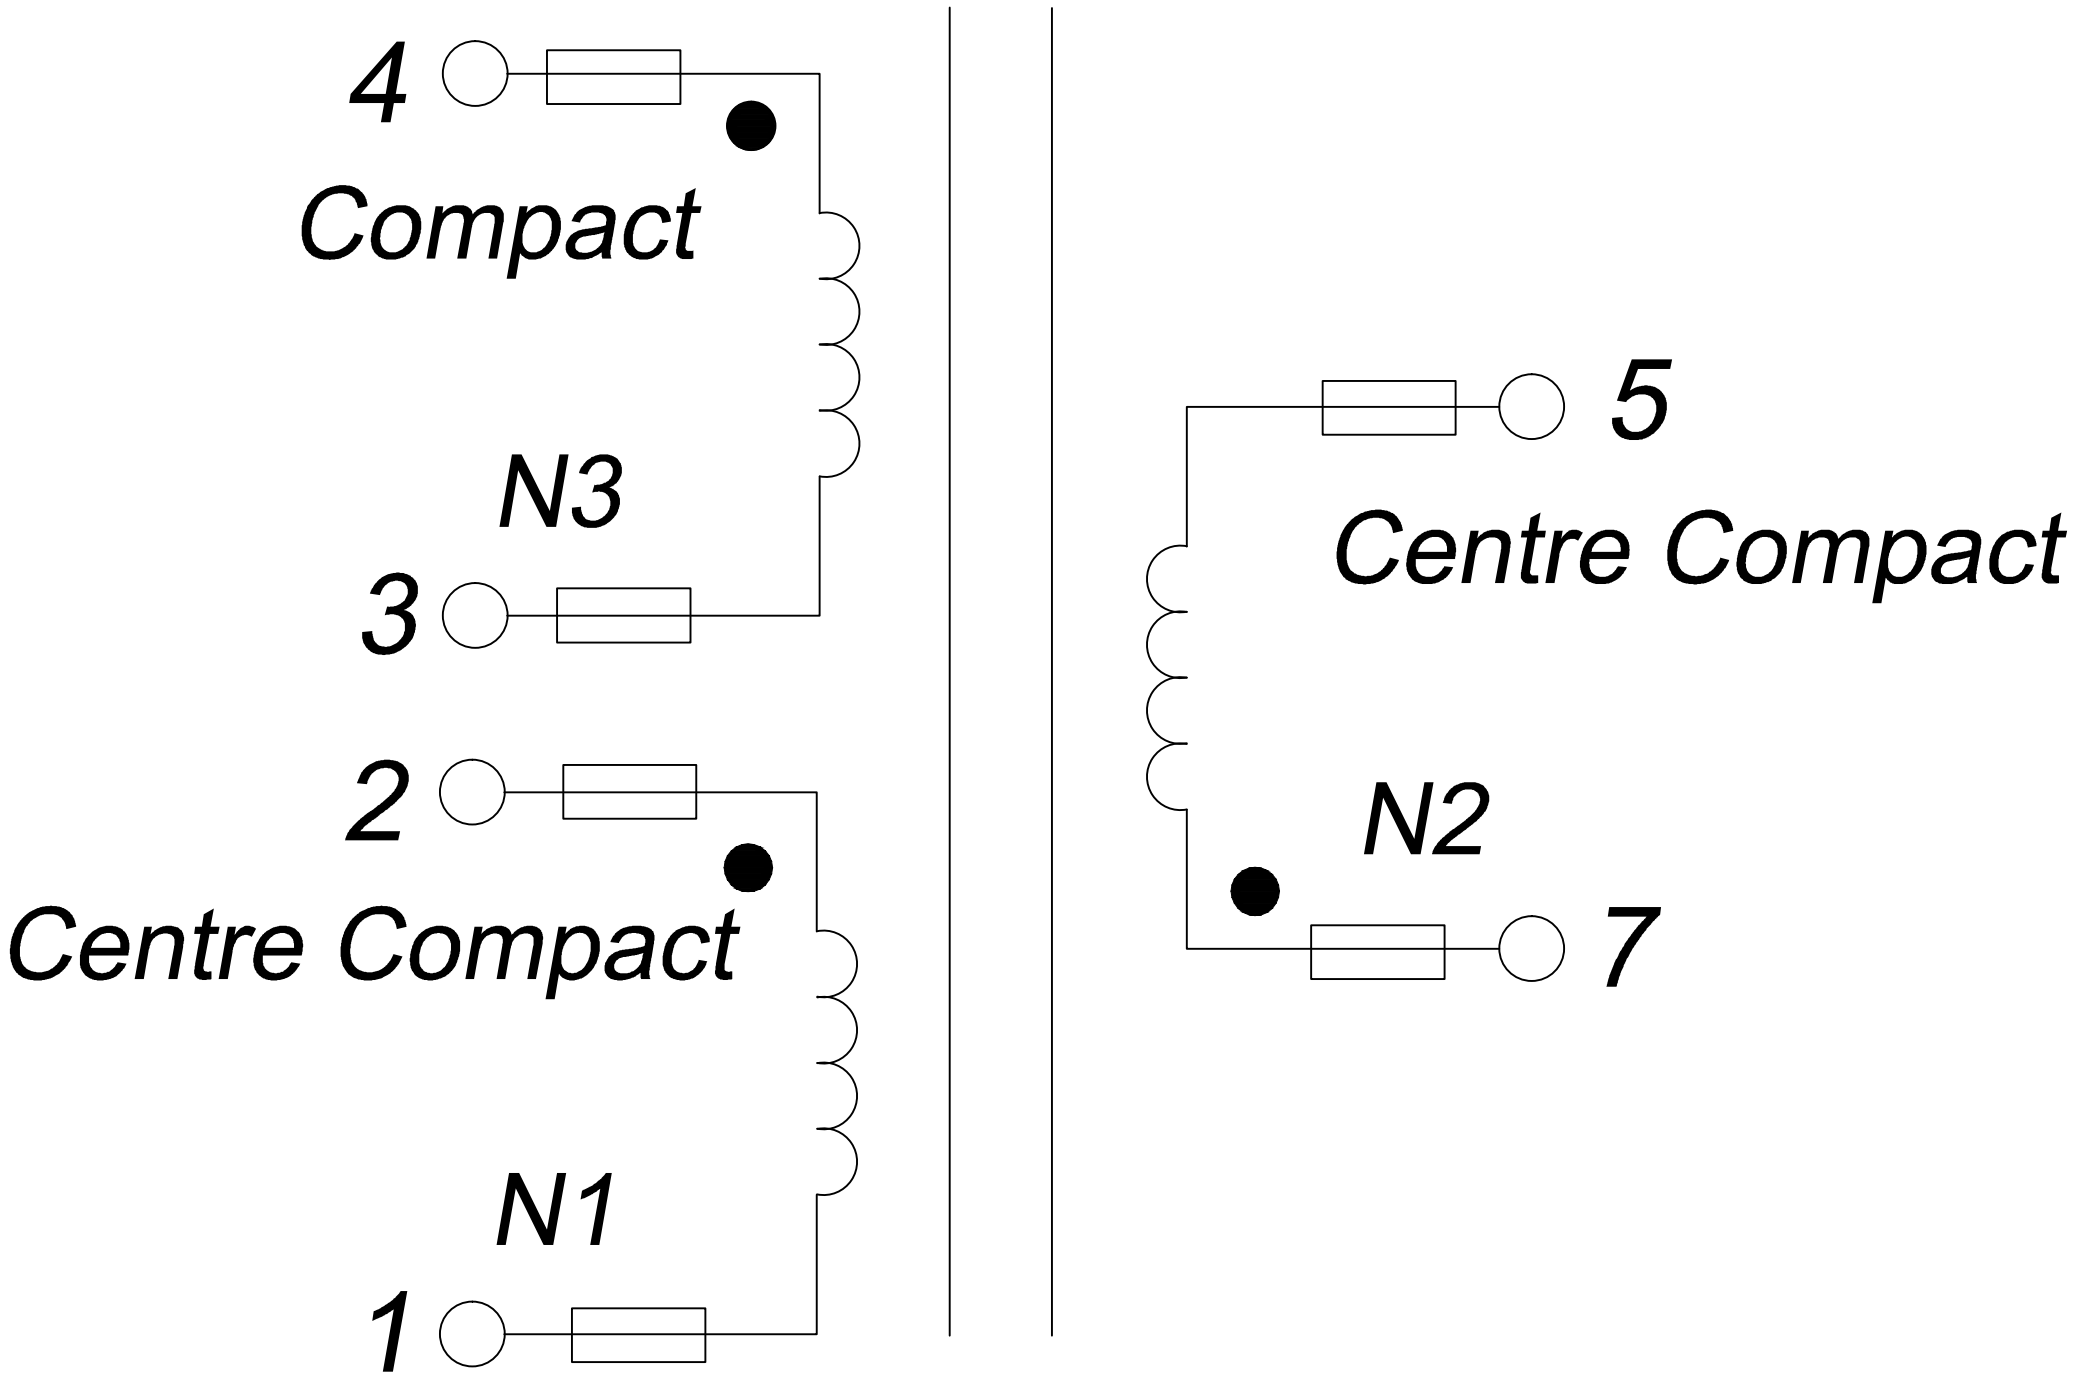


3.Material List

Core:FW40-EF12.6
BOBBIN:FWB1213(4+4)
Wire:2UEW 0.12mm TIW-B-0.2mm 130℃
Operating Temperature: -30 to 115℃

4.Electrical Specification

Inductance: L(1-2)=2.65mH±10% 1.0KHZ 0.25V
DCR: 5.7Ω±15%
LK: L(1-2)=80uH MAX short other pins
Hi-Pot: P-S AC 3.75KV 0.5mA 3S

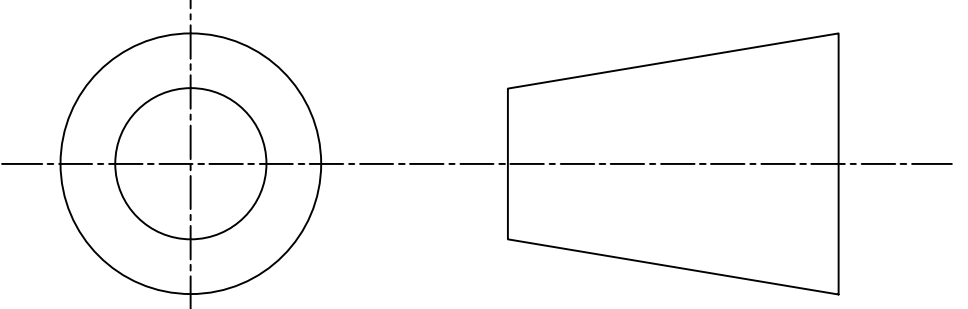REV.	DATE	 Convention Placement	DRW.		Drawing Title: TRANSFORMER Customer P/N:	Part No:
0	00/00		CHK.			FWPTEF12.6H262K
			APP.			Specification Sheet 1 of 1
RoHS		www.fosopower.com				