


CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES




1. Mechanical Dimensions

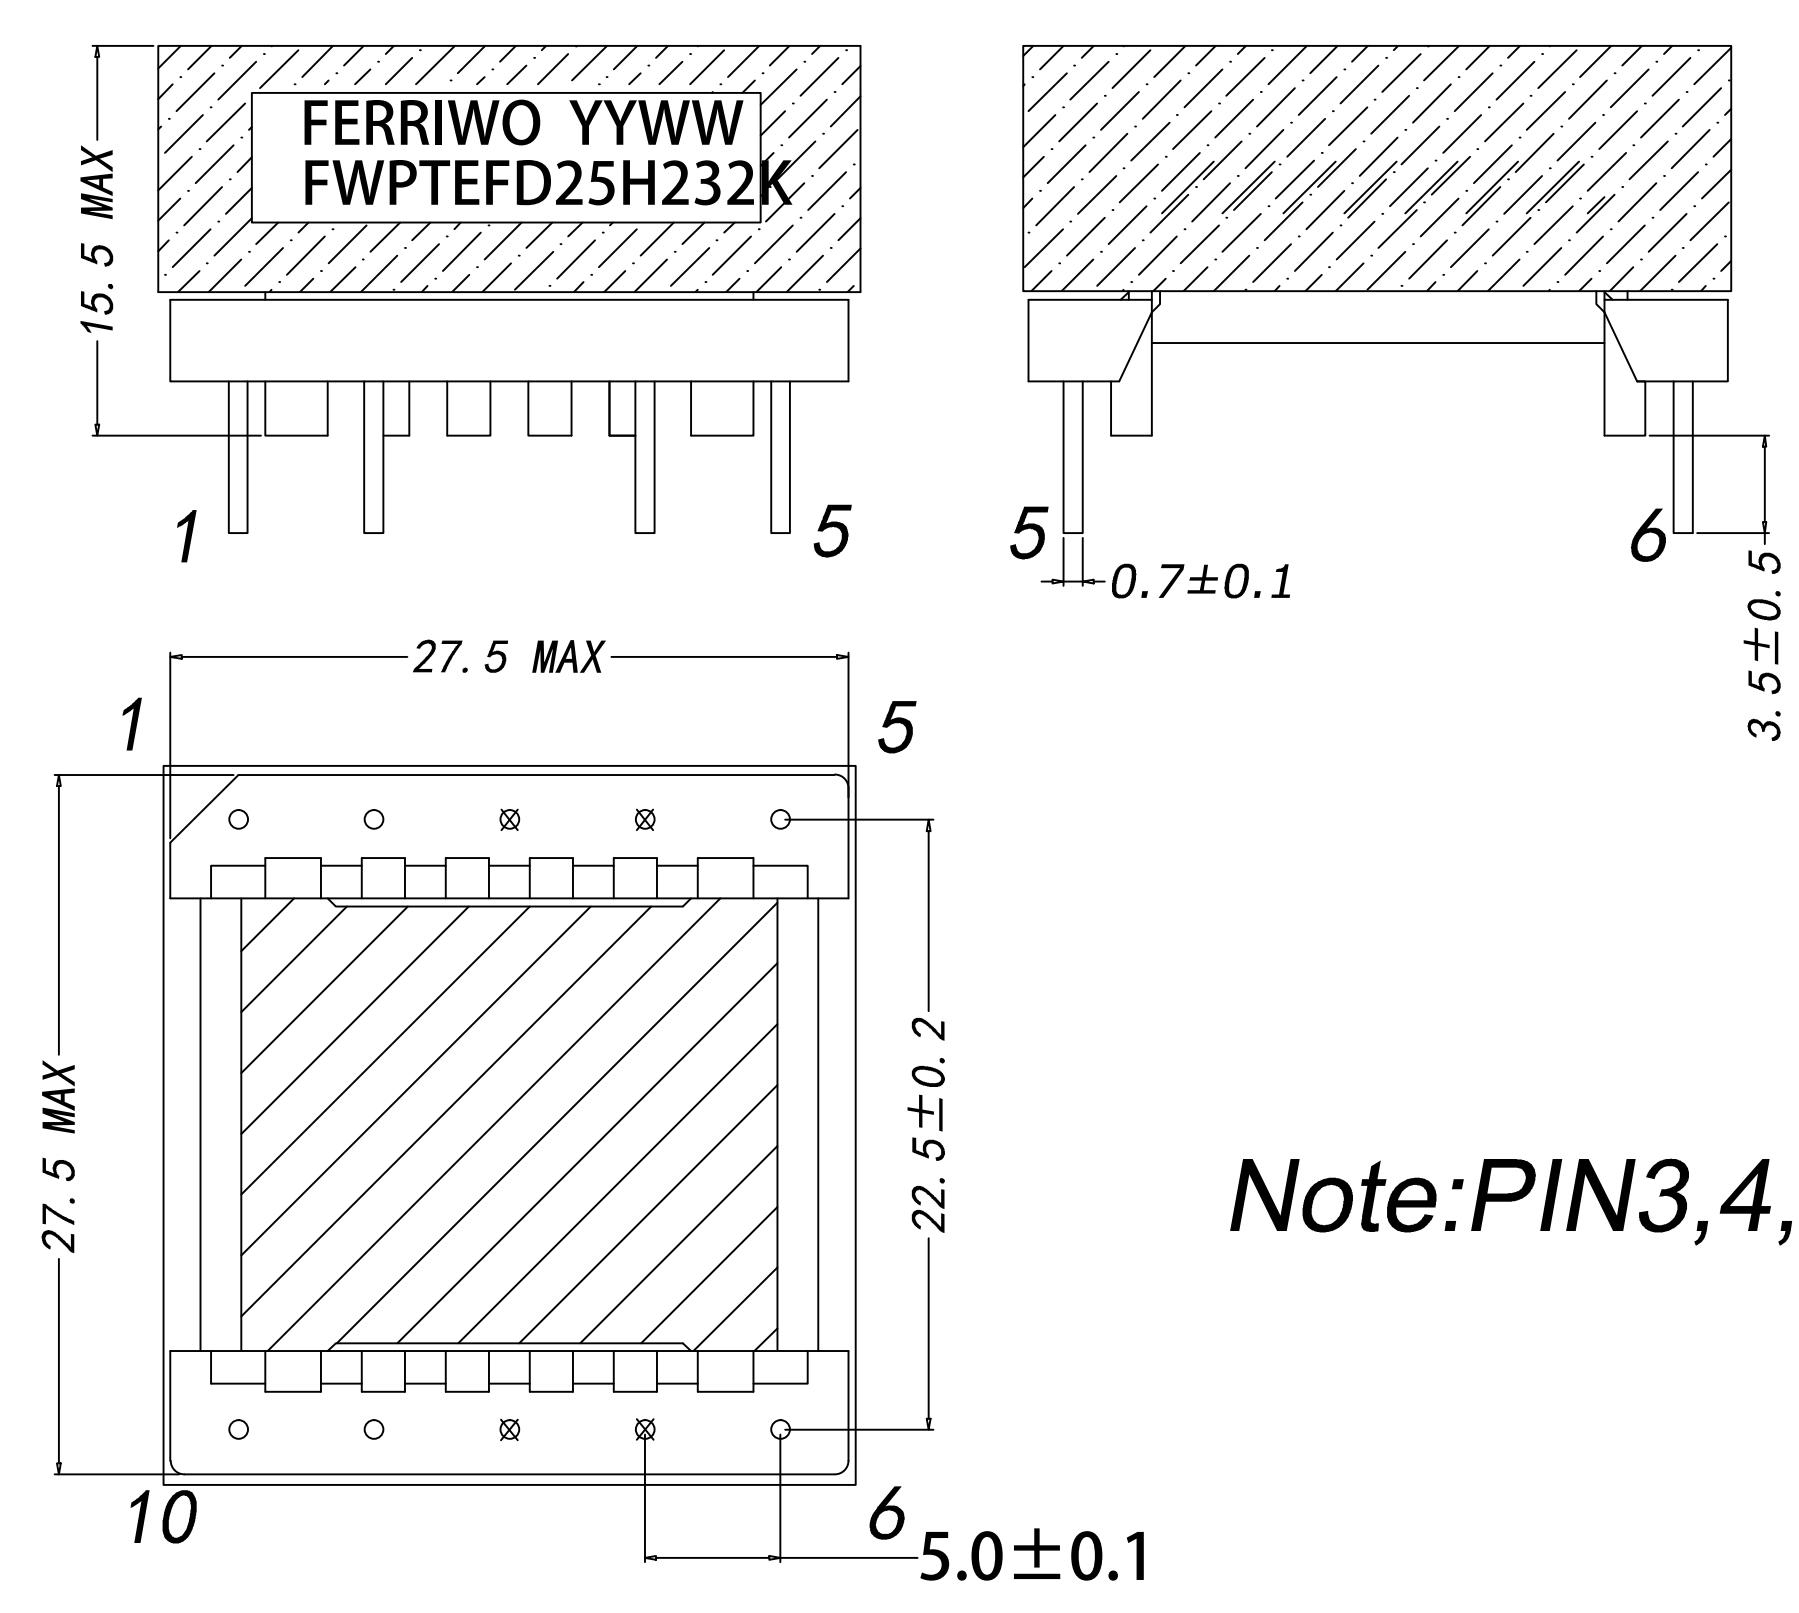

Note: PIN3,4,7,8 cut off

2. Schematic Diagram

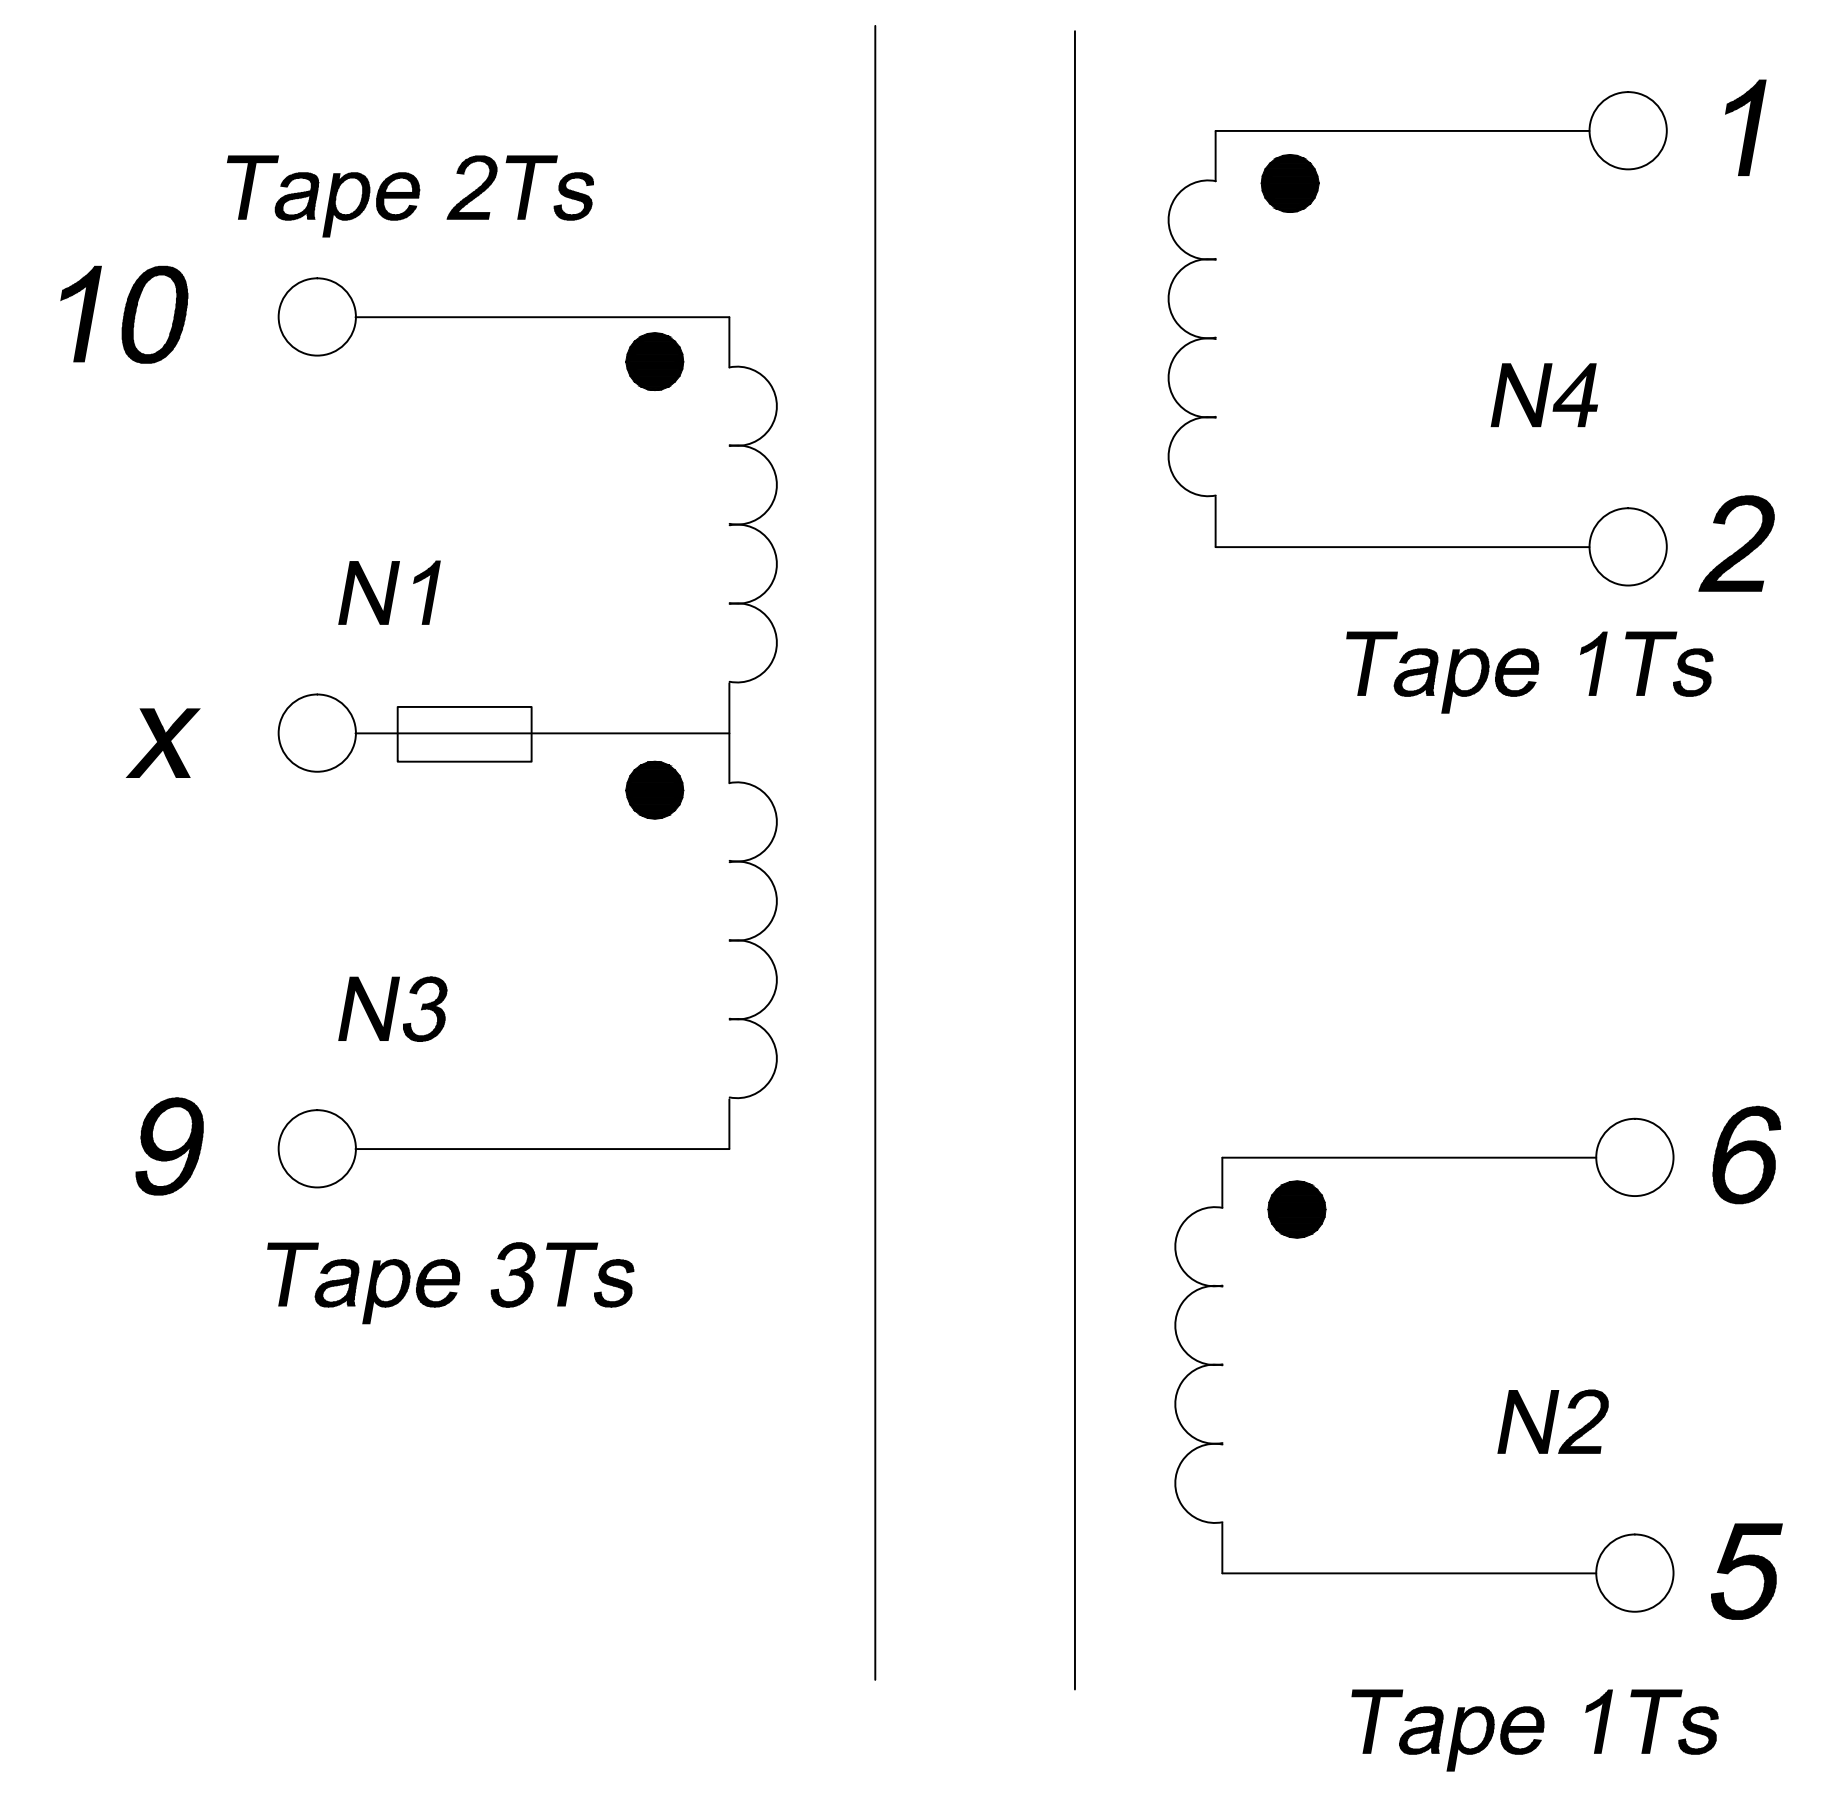

3. Material List

Core:FW44-EFD25/13/9
 Bobbin:FWB2506(5+5)
 Wire:2UEW-0.20/0.25/0.45mm 130°C
 Tube:TFL tube
 Operating Temperature: -30 to 115°C

4. Electrical Specification

Inductance: $L(10-9) = 2.3mH \pm 10\%$ 1.0KHZ 1.0V
 LK: $L(10-9) = 20uH$ MAX 100KHZ, 1.0V short other pins
 HI-POT: Coil-Coil AC 1500V 3mA 2s
 Coil-CORE AC 1500V 3mA 2s

REV.	DATE	 Convention Placement	DRW.	Drawing Title: TRANSFORMER	Part No:
0	00/00		CHK.		Customer P/N:
		www.fosopower.com	APP.		Specification Sheet 1 of 1