


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES



1.Mechanical Dimensions

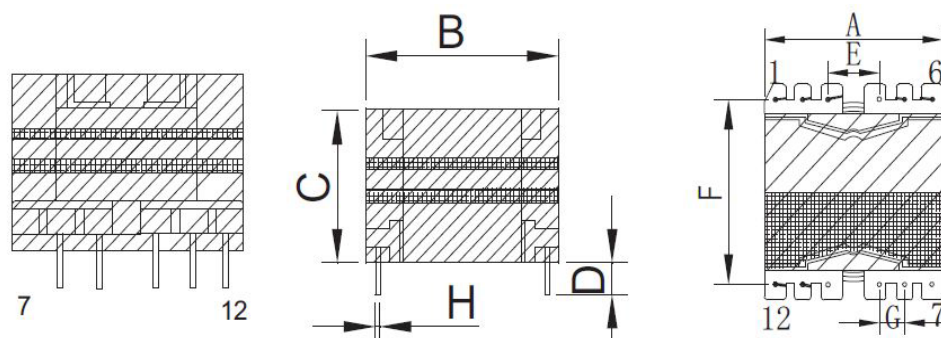

A	29.5	MAX
B	30.5	MAX
C	23.5	MAX
D	3.5	±0.5
E	7.6	±0.3
F	25.4	±0.4
G	3.8	±0.3
H	0.60	±0.1

3.Material List


Core:FW95 PQ2620

Bobbin:FWB2601(6+6PIN)

Wire:2UEW TIW

Operating Temperature: -30 to115 °C

2.Schematic Diagram

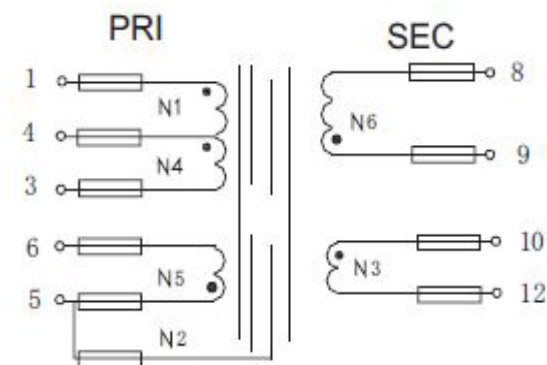

4.Electrical Specification

Inductance: L(1-3):1.0mH±5% 40KHZ 、 1V

Leakage Inductance : 15uH MAX 40KHZ 、 1V

DCR:(1-3)=830mΩMAX (10-12)=30mΩMAX

Hi-Pot:P-S: AC 60Hz 4000V 1.0mA 3S

P-CORE: AC 60Hz 500V 1.0mA 3S

REV.	DATE	 Convention Placement	DRW.		Drawing Title:	Part No:
0	00/00		CHK.			
			APP.		Customer P/N	FWPTPQ2620V102J
ROHS		www.fosopower.com		Specification Sheet 1of 1		

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION