


CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES




1.Mechanical Dimensions

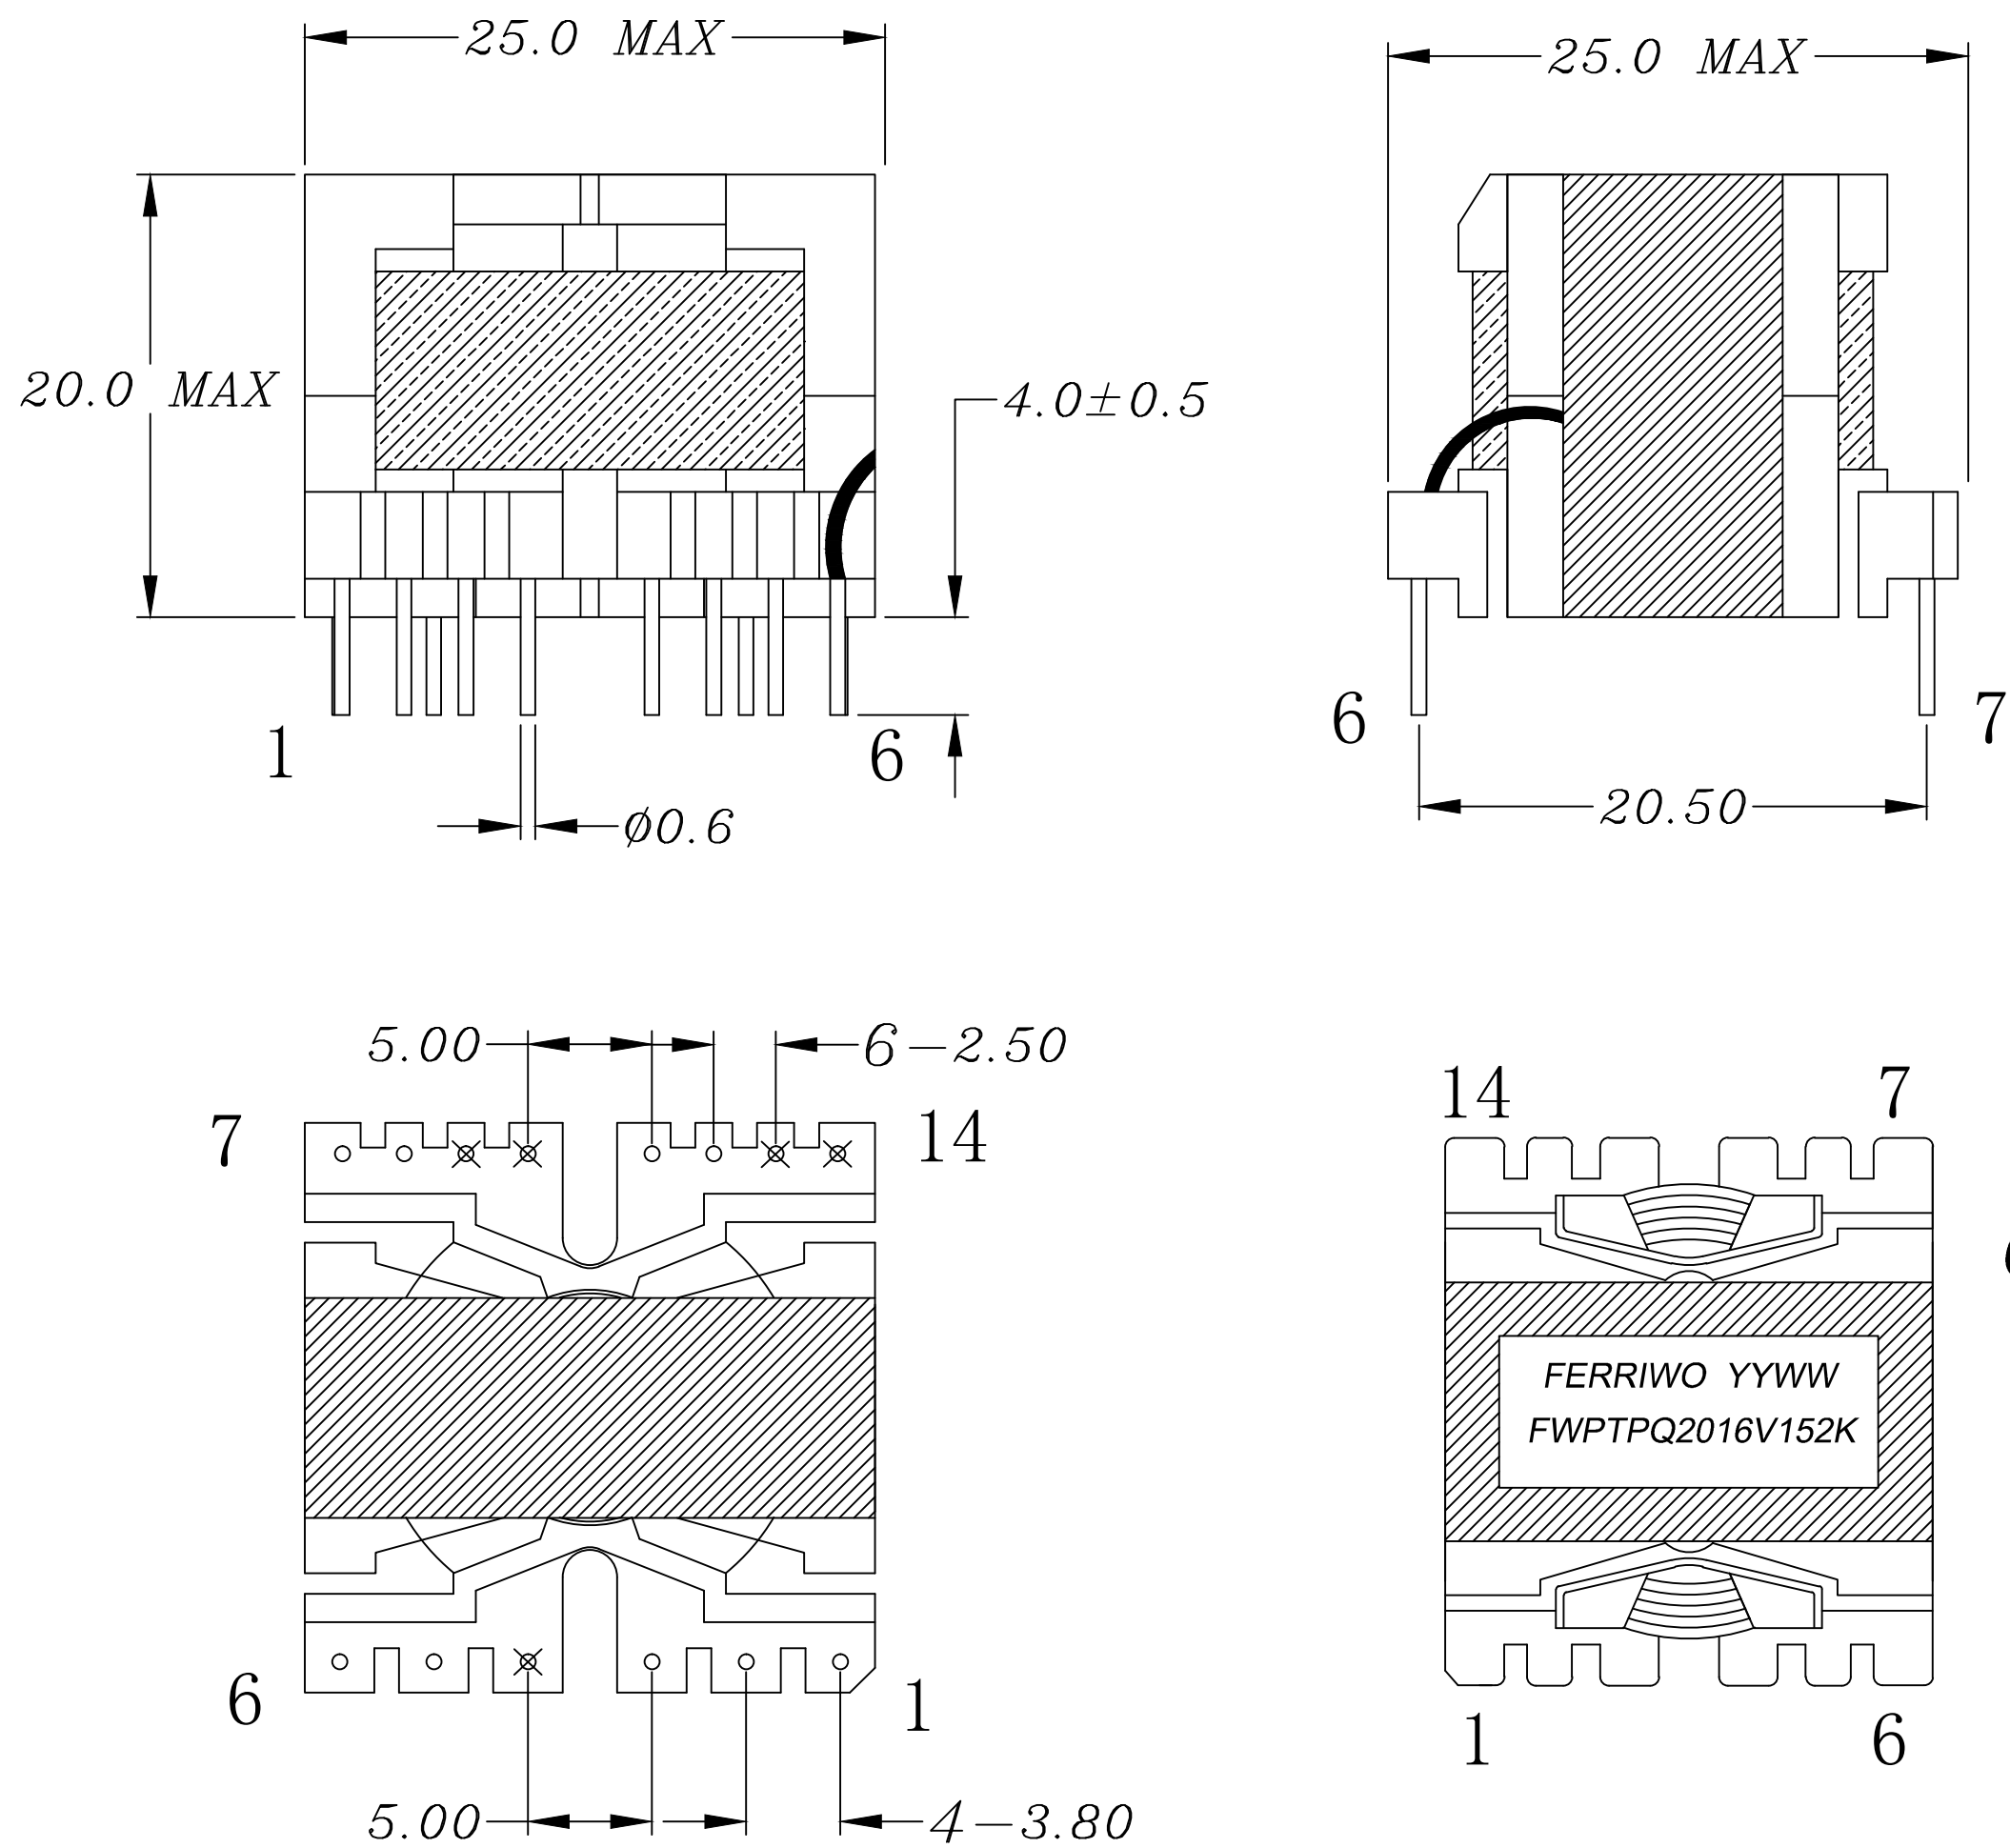

Note: PIN4,9,10,13,14
cut off PIN2 cut off 2/3
Use 0.25mm copper wire
connected to PIN6.

2.Schematic Diagram

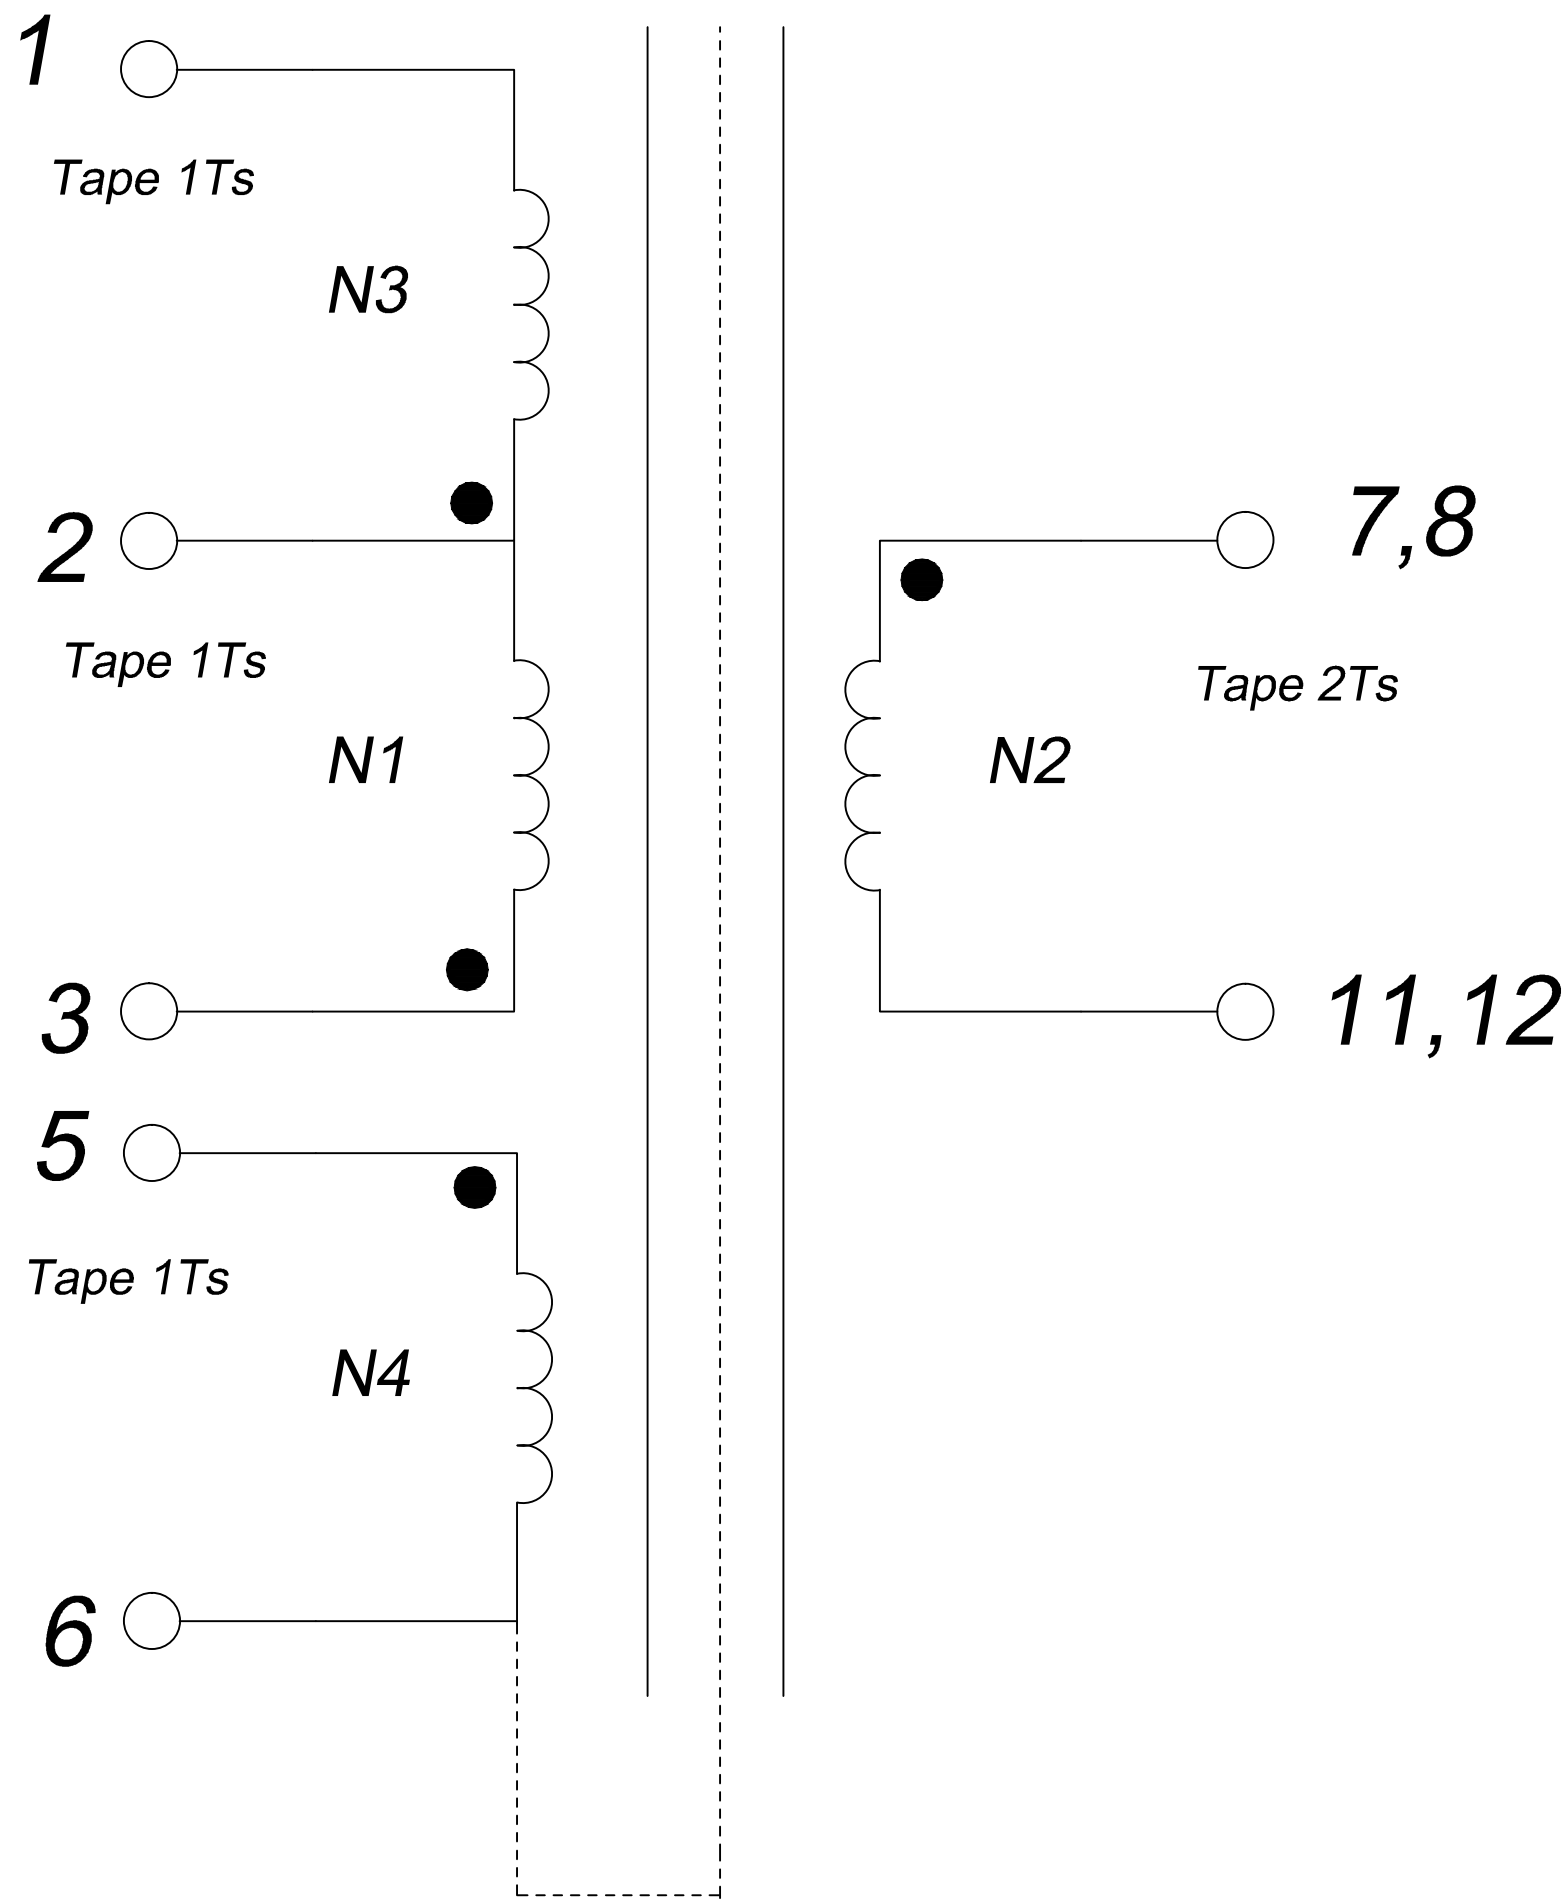


3.Material List

Core:FW40-PQ2016
Bobbin:FWB2023(6+8PIN)
Wire:2UEW-0.15/0.25mm TIW-B-0.37mm 130℃
Tape: CT-280-25u
Operating Temperature: -30 to 115℃

4.Electrical Specification

Inductance: L(1-3)=1550uH±10% 1.0KHZ 1.0V
Hi-pot: P-S AC 2.5KV 3mA 3S
S-CORE AC 2.5KV 3mA 3S

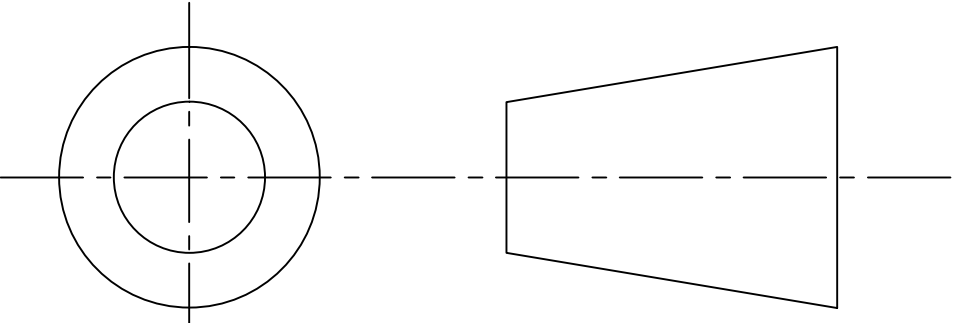REV.	DATE	 Convention Placement www.fosopower.com	DRW.		Drawing Title: TRANSFORMER Customer P/N:	Part No:
0	00/01		CHK.			FWPTPQ2016V152K
			APP.			Specification Sheet 1 of 1