



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES

1. Mechanical Dimensions

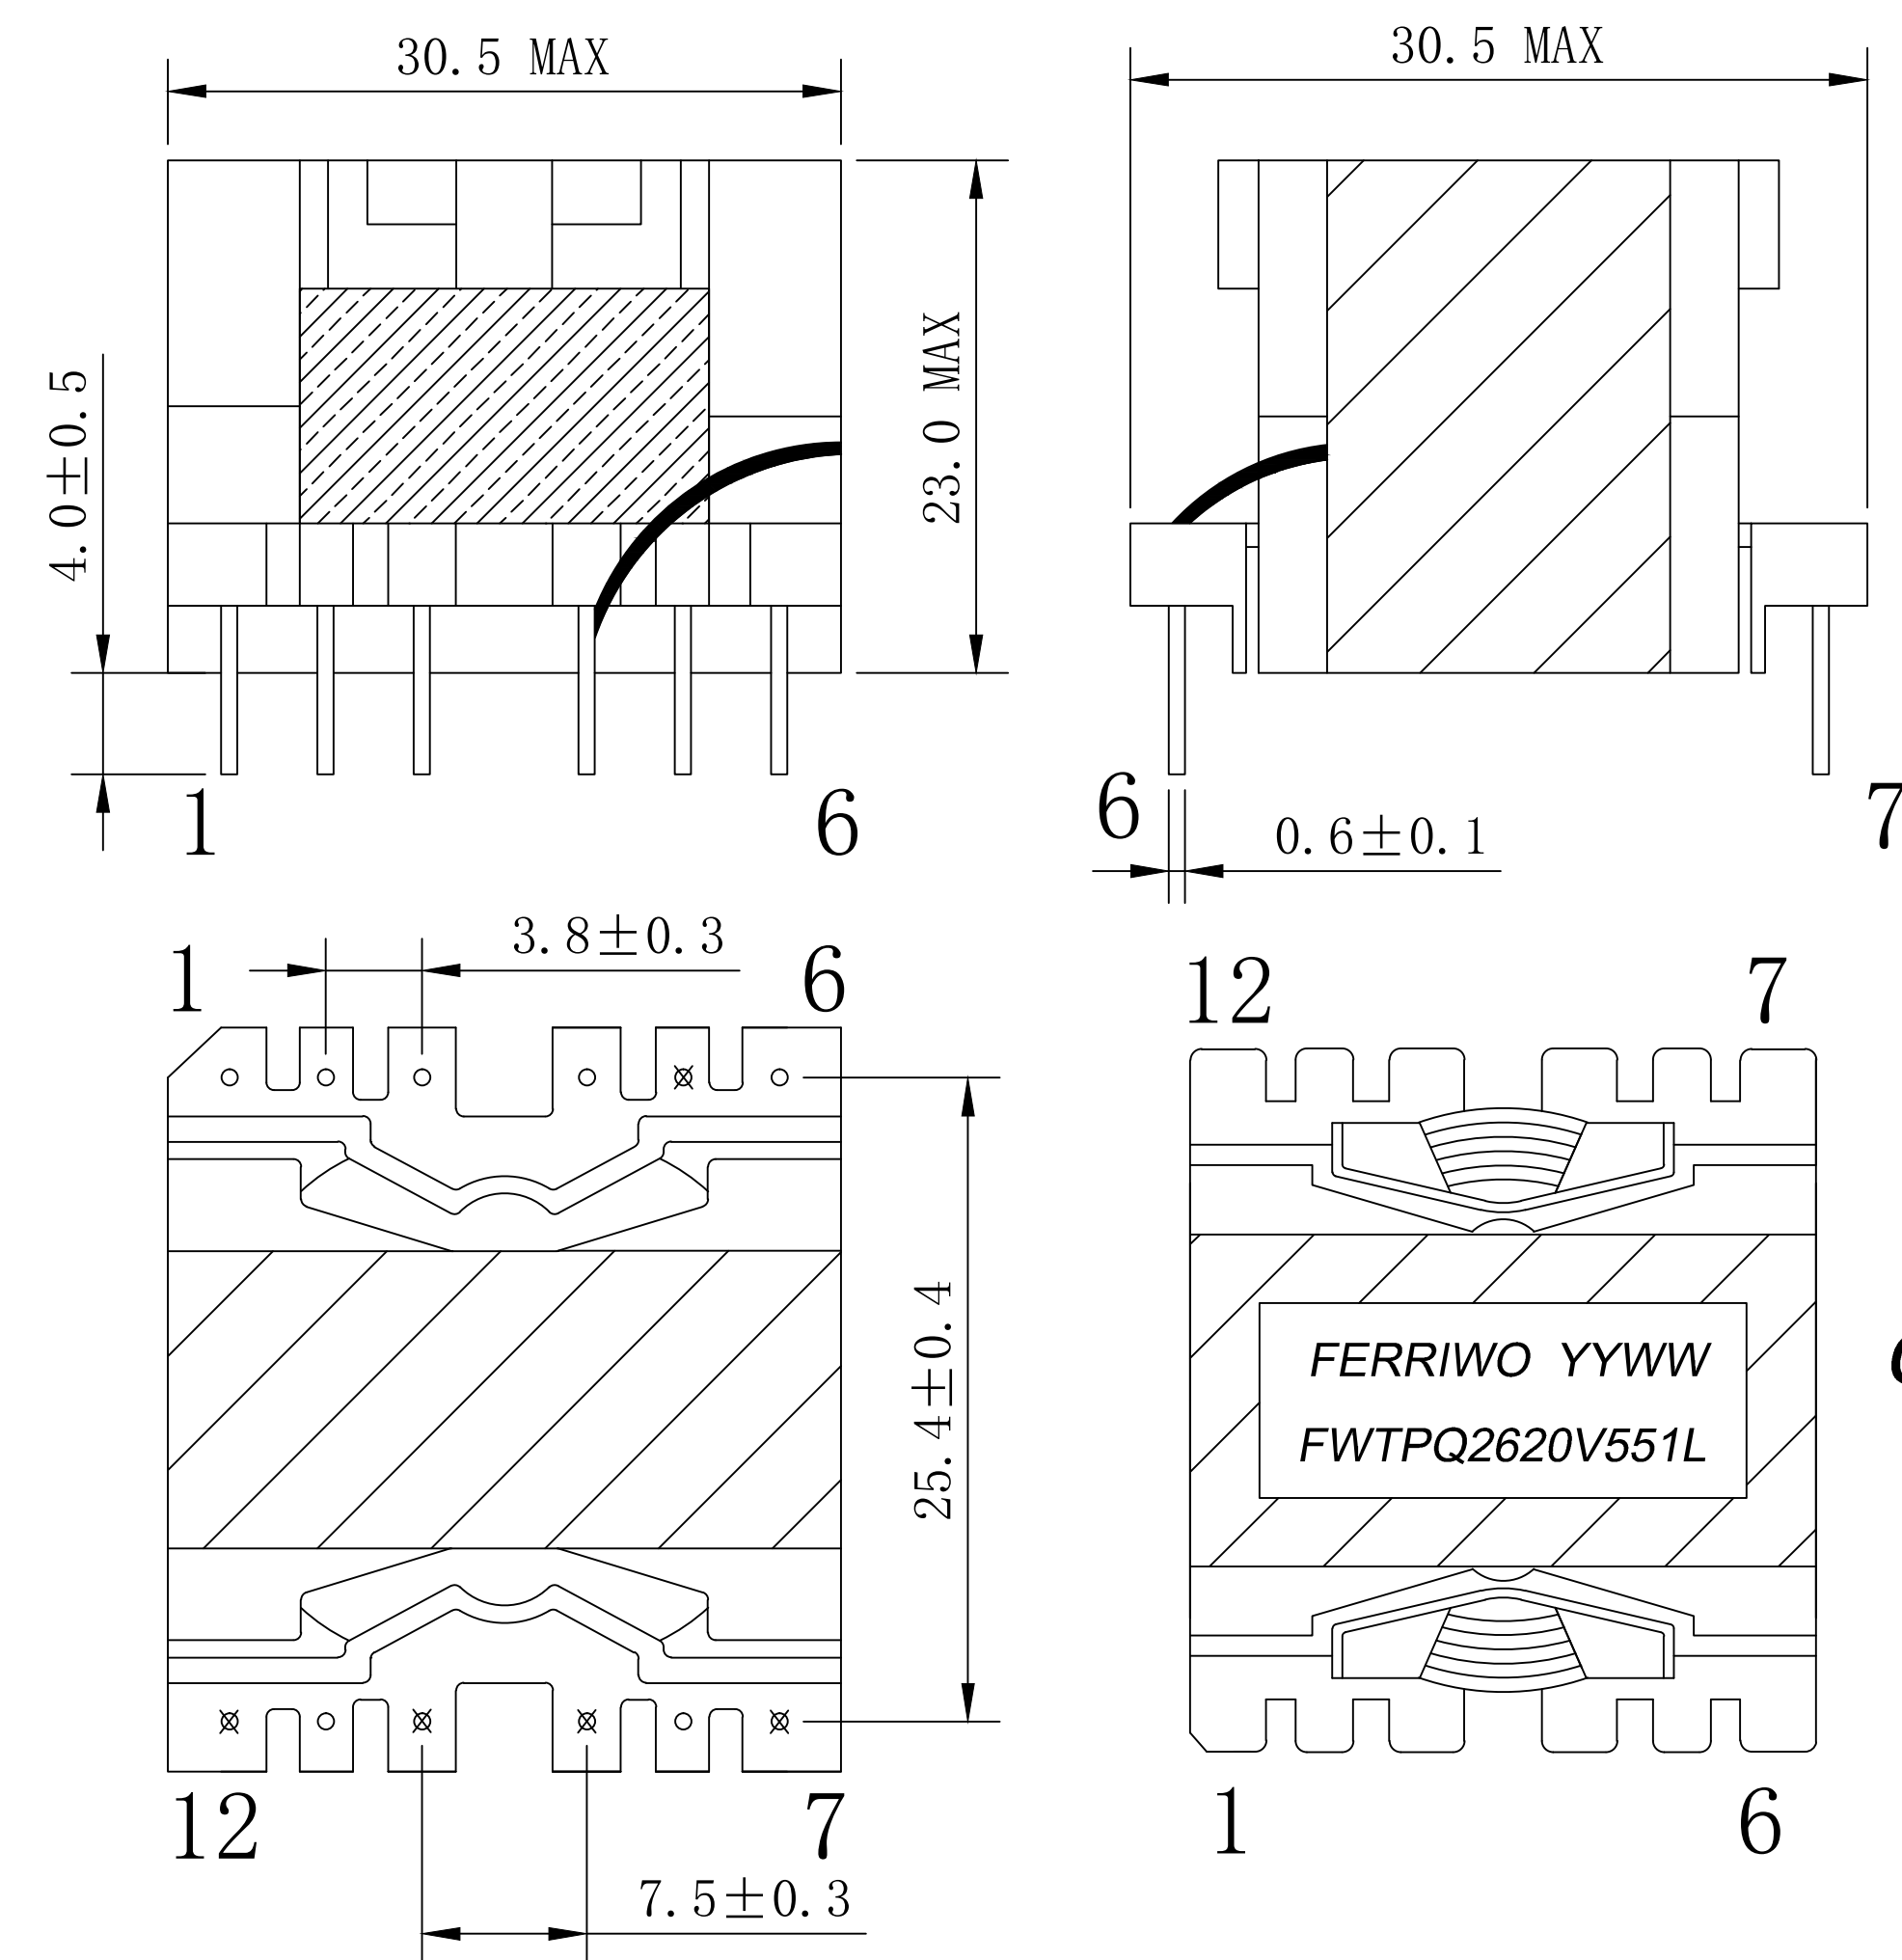

Note: PIN5,7,9,10,12 cut off PIN2 cut off 2/3 Use 0.4mm copper wire connected to PIN4.

2. Schematic Diagram

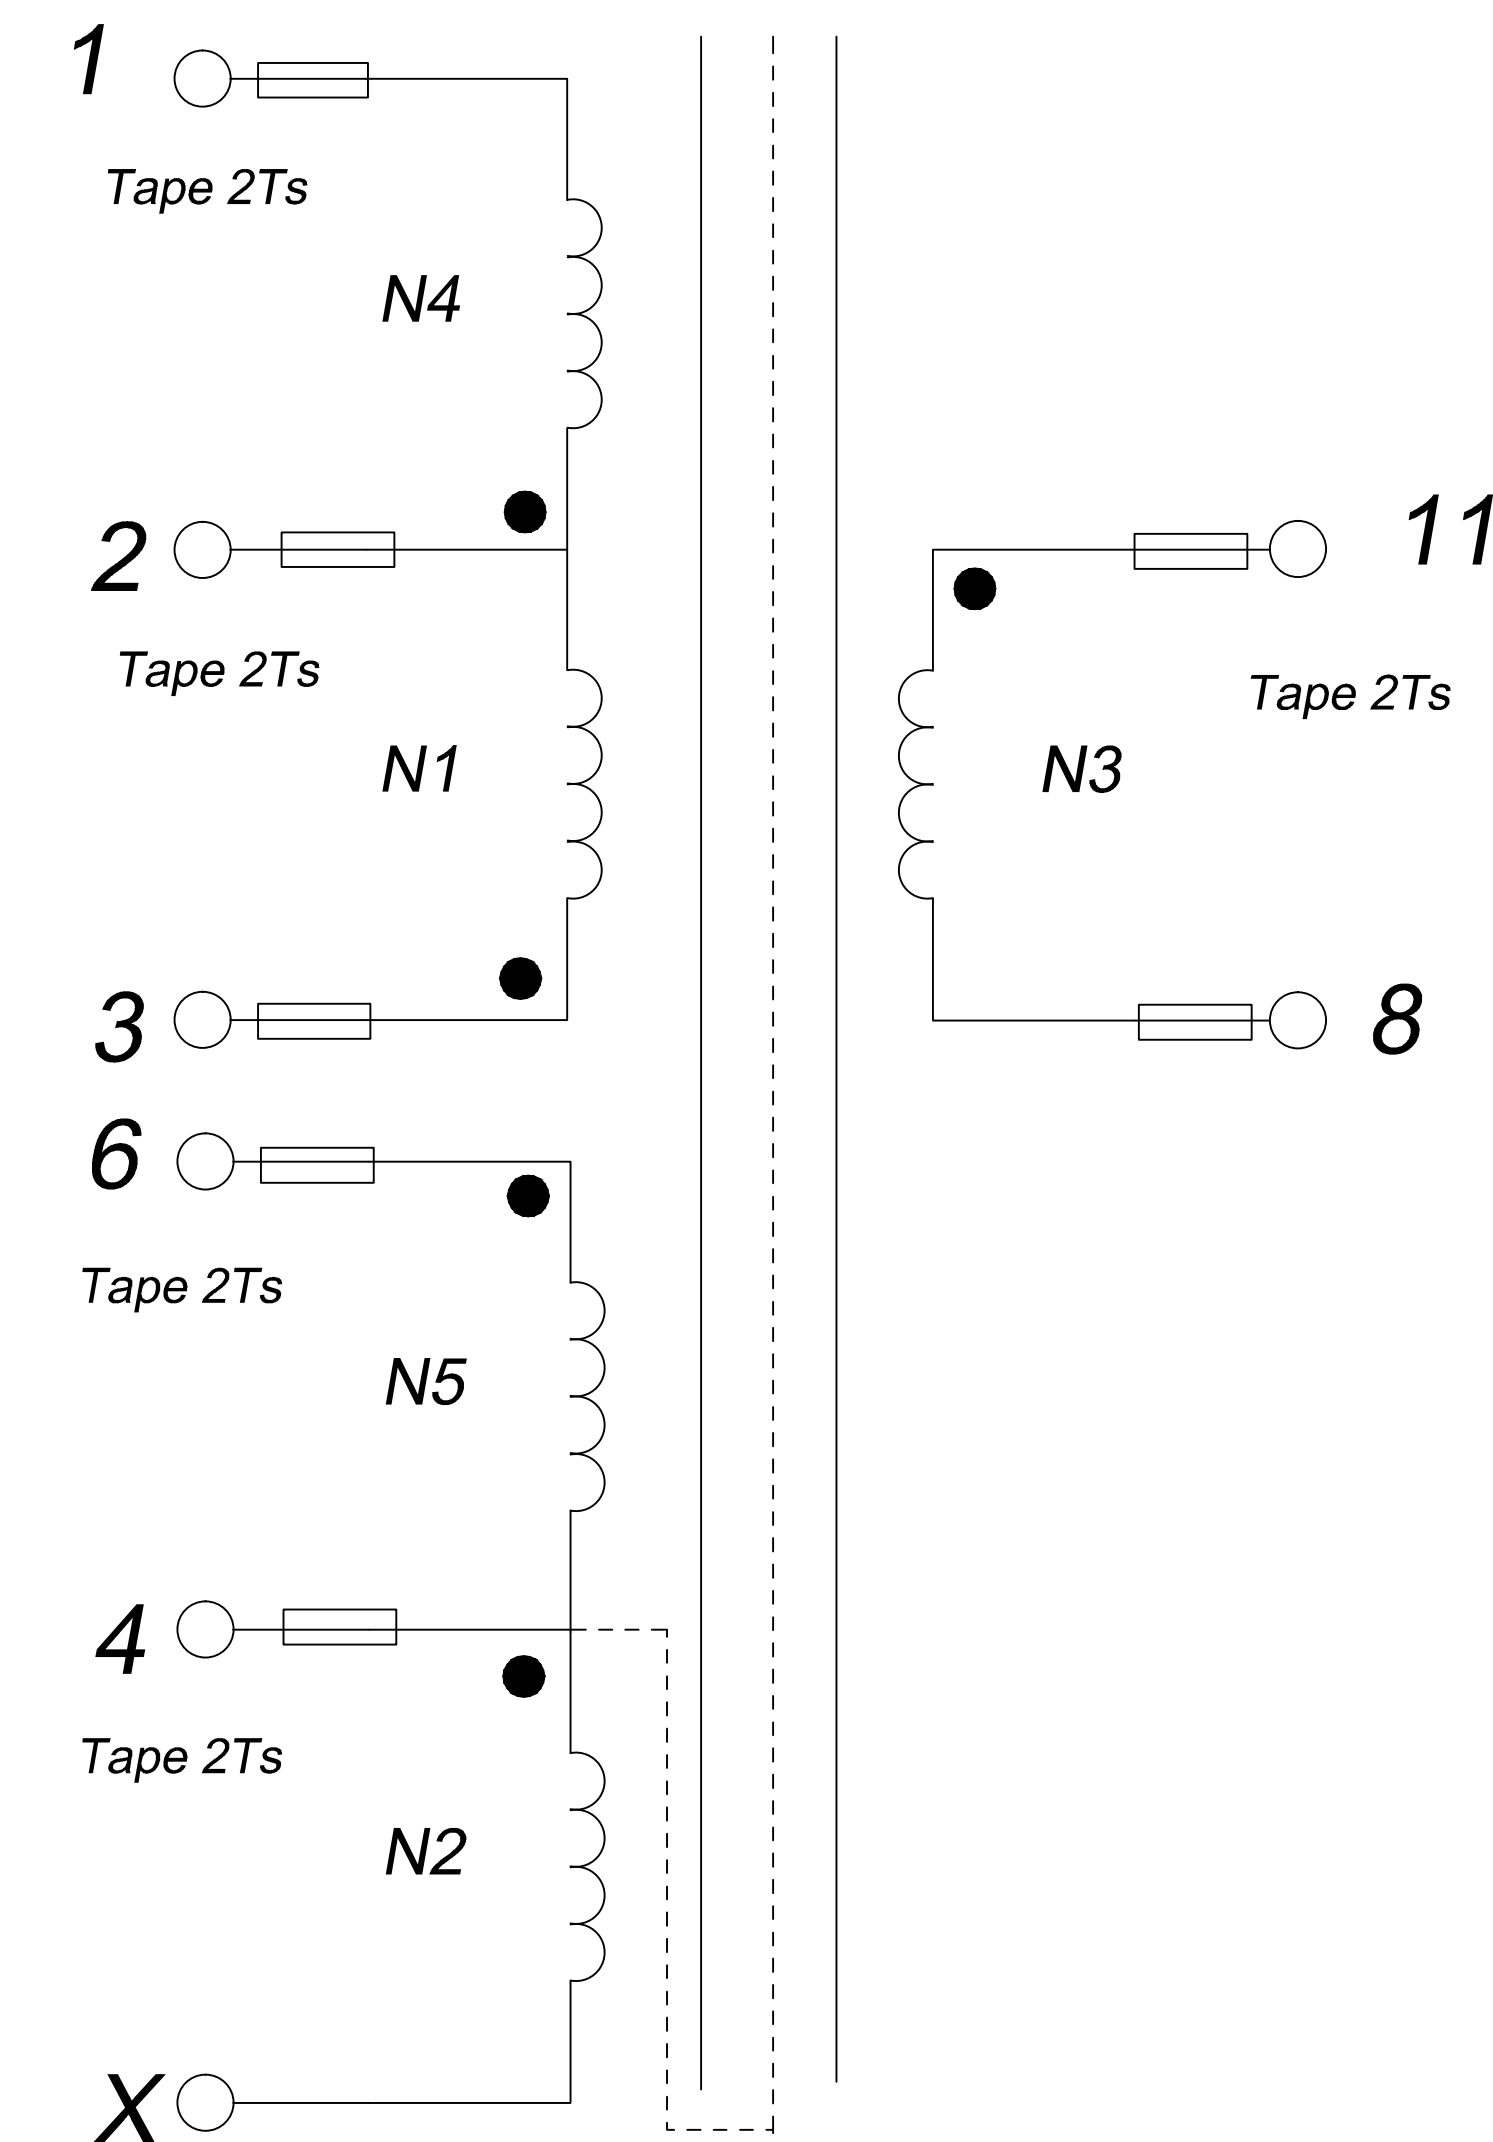

3. Material List

Core: FW40-PQ2620
 Bobbin: FWB2601(6+6PIN)
 Wire: 2UEW-0.12/0.15/0.40mm TIW-B-0.45mm 130°C
 Tube: TFL tube
 Operating Temperature: -30 to 115°C

4. Electrical Specification

Inductance: $L(1-3) = 550\mu H \pm 15\%$ 1.0KHZ 1.0V
 Hi-pot: P-S AC 2.5KV 3mA 3S
 S-CORE AC 2.5KV 3mA 3S

REV.	DATE	 Convention Placement	DRW.	Drawing Title: TRANSFORMER	Part No:
0	00/01		CHK.		Customer P/N:
		www.fosopower.com	APP.		Specification Sheet 1 of 1