



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES



1.Mechanical Dimensions

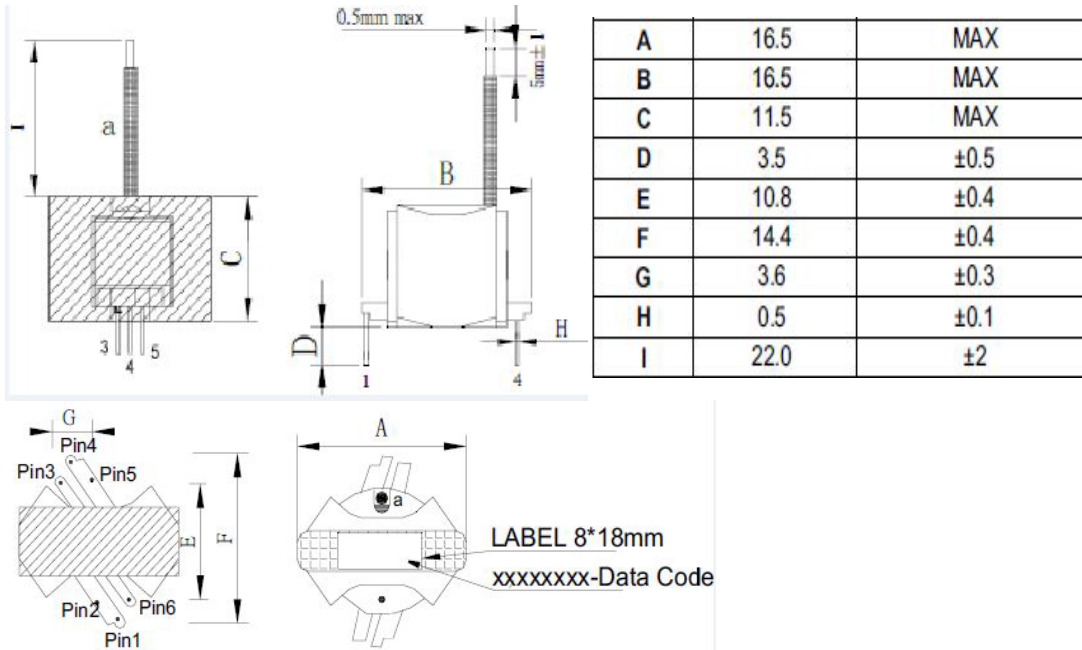

2.Schematic Diagram

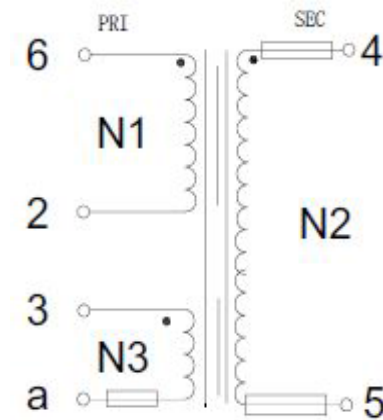

3.Material List

Core:FW44 RM5
 Bobbin:FWB0501(3+3PIN)
 Wire:2UEW
 Operating Temperature: -30 to115 °C

4.Electrical Specification

Inductance : L(6-2):3.4mH ±5% 50KHZ , 1.0V
 Leakage inductance : 240uHMAX 50KHZ , 1.0V
 DCR : (6-2)=8.5Ω MAX
 Hi-Pot:P-S: AC 60Hz 1000V 1mA 3S

REV.	DATE	 Convention Placement	DRW.	Drawing Title:	Part No:		
0	00/00		CHK.			TRANSFORMER	FWPTRM5V342J
			APP.			Customer P/N	Specification Sheet 1of 1
ROHS		www.fosopower.com					